



The Future of Analog IC Technology®

EV20056-G-00A

Fast Transient Response, Ultra-Small 250mA Linear Regulator EV Board

DESCRIPTION

The EV20056-G-00A evaluation board demonstrates the performance of MP20056-18, a low noise, low dropout and high PSRR linear regulator. It operates from a 2.5V to 5.5V input voltage and the output voltage is preset internally at 1.8V.

The EV20056-G-00A can supply up to 250mA of load current, and features current limiting, over temperature protection.

An internal PMOS pass element is used to allow a low 150µA ground current, making the MP20056-G suitable for battery-power devices.

ELECTRICAL SPECIFICATIONS

| Parameter | Symbol | Value | Units |
|----------------|------------------|-----------|-------|
| Input Voltage | V _{IN} | 2.5 – 5.5 | V |
| Output Voltage | V _{OUT} | 1.8 | V |
| Load Current | I _{OUT} | 250 | mA |

FEATURES

- Up to 250mA Output Current
- Low 100mV Dropout at 250mA
- Fast Transient Response
- 70dB PSRR at 1kHz
- 13µV_{RMS} Low Noise Output
- Fixed output voltage 1.8V
- Current Limit and Thermal Protection

APPLICATIONS

- Telecom
- Cellular Phones
- DSP, FPGA Supplies
- Hand –Held Instruments
- Notebook Computers

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

EV20056-G-00A EVALUATION BOARD




(L x W x H) 2.5" x 2.5" x 0.4"
(6.35cm x 6.35cm x 1.1cm)

| Board Number | MPS IC Number |
|---------------|---------------|
| EV20056-G-00A | MP20056-G-1.8 |

Note: MPQ20056 and MP20056 share the same EVB.

EVALUATION BOARD SCHEMATIC

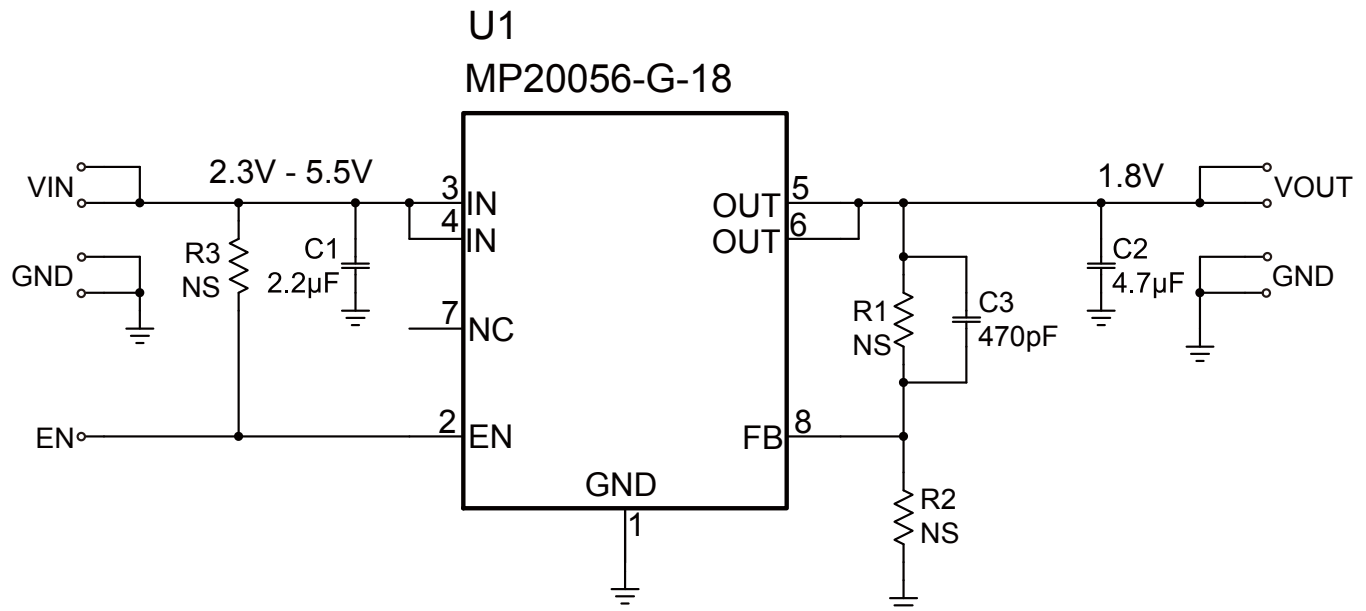









EV20056-G-00A BILL OF MATERIALS

| Qty | Ref | Value | Description | Package | Manufacturer | Manufacturer P/N |
|-----|----------------------|------------|------------------------------|-------------|--------------|--------------------|
| 1 | C1 | 2.2µF | Ceramic Cap., 6.3V, 10%, X5R | 0603 | muRata | GRM188R60J225KE19D |
| 1 | C2 | 4.7µF | Ceramic Cap., 6.3V, 10%, X5R | 0603 | muRata | GRM188R60J475KE19D |
| 1 | C3 | 470pF | CAP, 0603, 50V, X7R, 10% | 0603 | muRata | GRM188R71H471KA01D |
| | R1,R2,R3 | NS | | 0603 | | |
| 1 | U1 | | Linear Regulator | QFN8(2X2mm) | MPS | MP20056GG-18-R5 |
| 4 | VIN, VOUT, GND | Test Point | Test Point | 2x2.54mm | HZ | China market |
| 1 | EN | Test Point | Test Point | Test Point | HZ | China market |

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 2.5V$, $V_{OUT} = 1.8V$, $T_A = 25^\circ C$, unless otherwise noted.

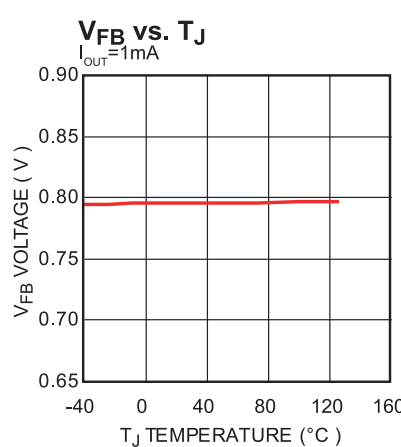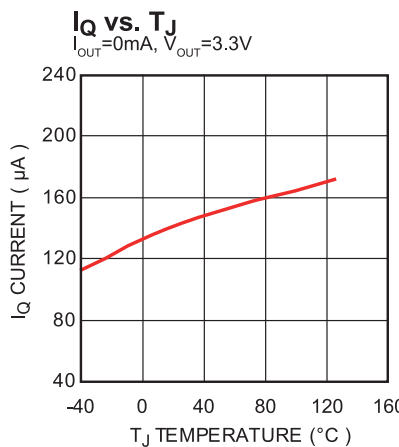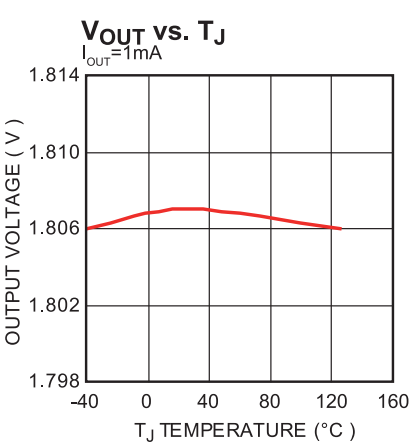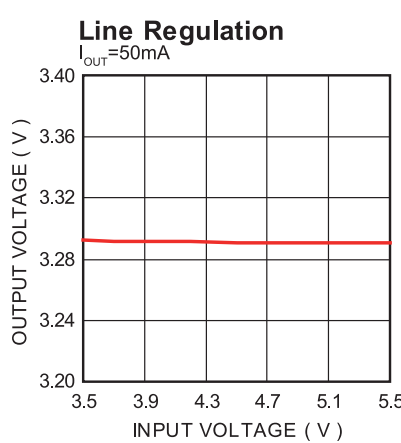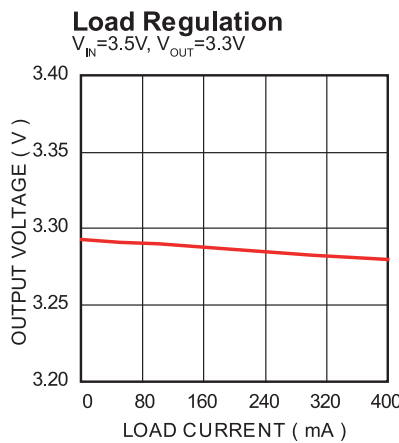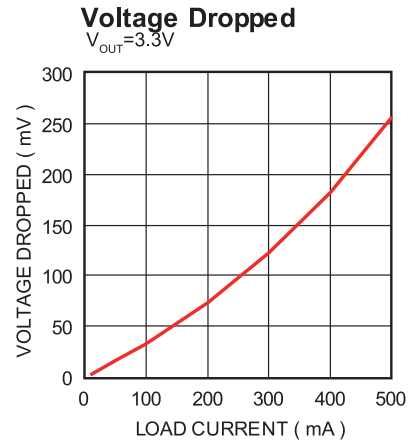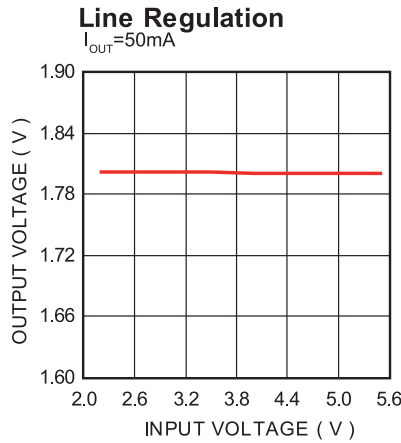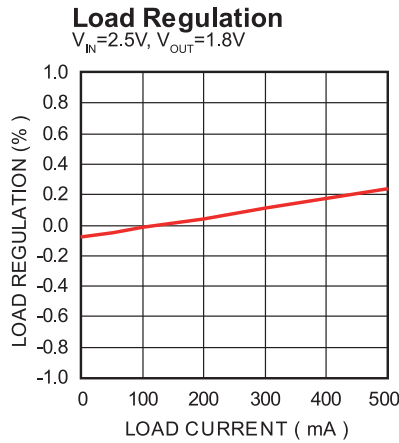


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 2.5V$, $V_{OUT} = 1.8V$, $T_A = 25^{\circ}C$, unless otherwise noted.


Steady State

$I_{OUT} = 0.5A$

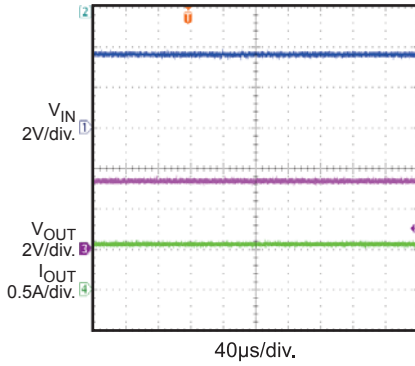


Steady State

$I_{OUT} = 0.5A$

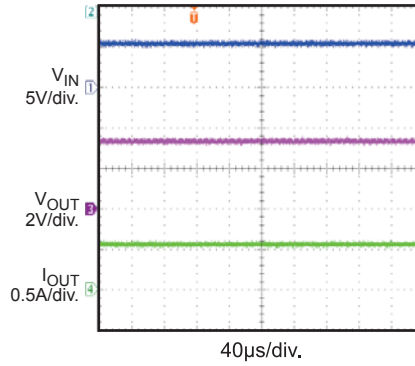


Load Transient

$I_{OUT} = 50mA-0.2A$

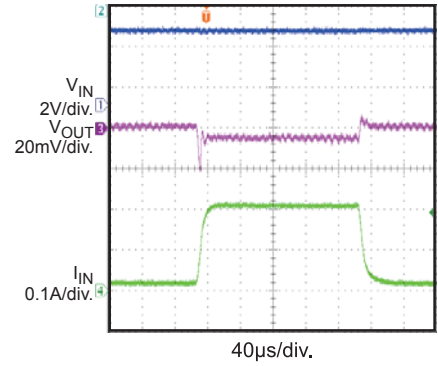


Enable On

$I_{OUT} = 0.4A$

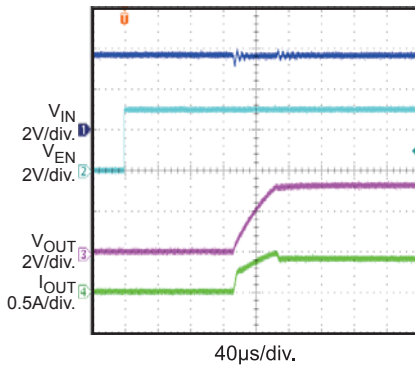


Enable Off

$I_{OUT} = 0.4A$

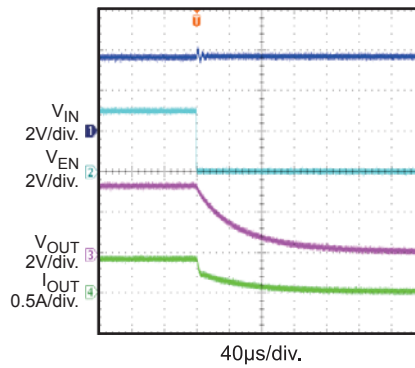


Short Output

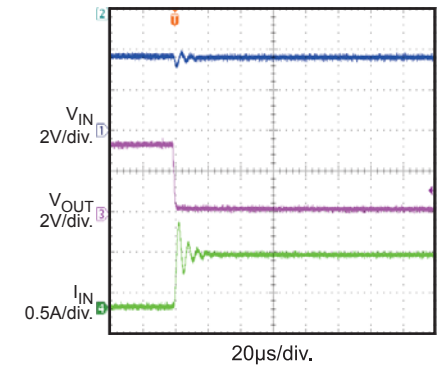


Power Ramp Up

$I_{OUT} = 0.5A$

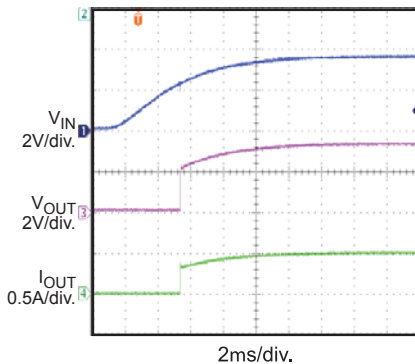


Power Ramp Down

$I_{OUT} = 0.5A$

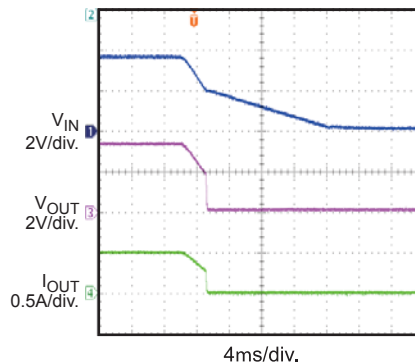

Short Output Recovery

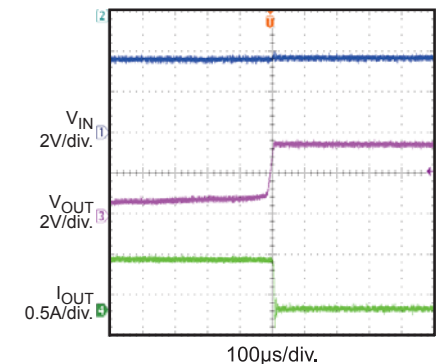

PRINTED CIRCUIT BOARD LAYOUT

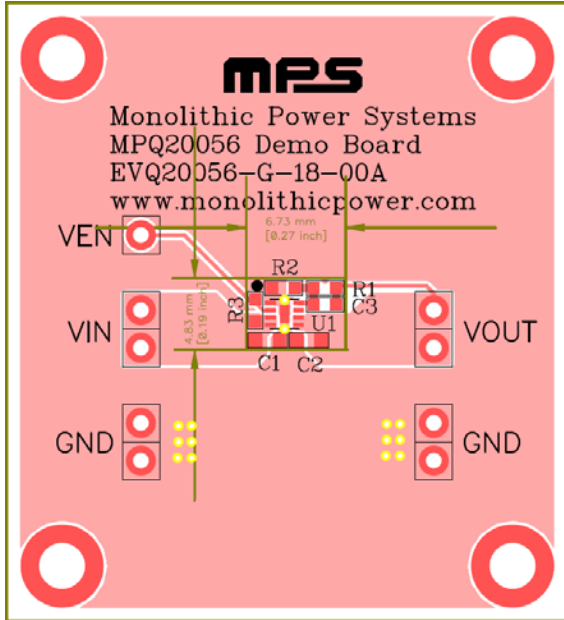


Figure 1—Top and Top Silk Layer

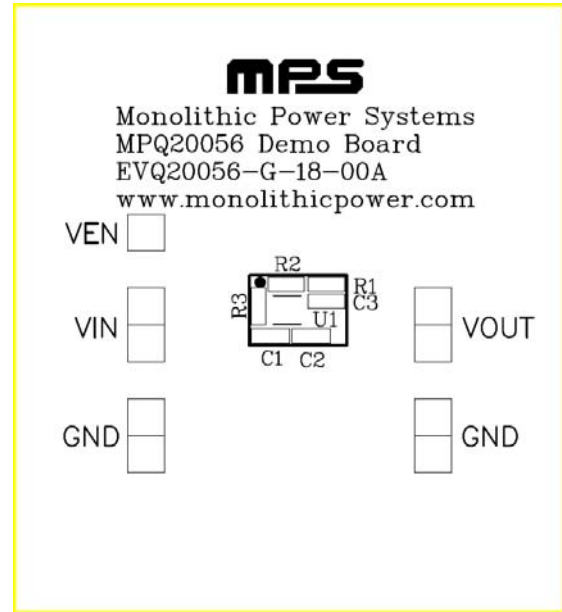


Figure 2—Top Silk Layer

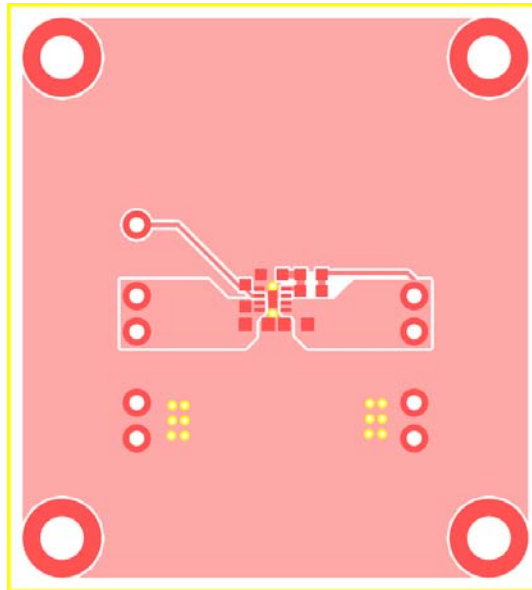


Figure 3—Top Layer

QUICK START GUIDE

1. Connect the positive terminal of the load to VOUT pins, and the negative terminal of the load to GND pins.
2. Preset the power supply output to 2.5V $<V_{IN}<5.5V$ and turn off the power supply.
3. Connect the positive terminal of the power supply output to the VIN pin and the negative terminal of the power supply output to the GND pin.
4. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.5V to turn on the regulator or less than 0.4V to turn it off.
5. Turn on the power supply. The EVQ20056-G will automatically start up.
6. The output voltage is fixed 1.8V.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.