

DESCRIPTION

The EV9447-L-00A is an evaluation board for the MP9447, a high-efficiency step-down regulator with integrated power MOSFETs.

MP9447 offers a very compact solution to achieve a 5A, continuous-output current over a wide input-supply range with excellent load and line regulation. It also provides fast transient response and good stability for wide input-supply and load range.

The EV9447-L-00A is a fully assembled and tested evaluation board. It generates a +5V output voltage at load current up to 5A from a 7V to 36V input range. Switching frequency is set at 500kHz.

ELECTRICAL SPECIFICATIONS

| Parameter | Symbol | Value | Units |
|----------------|-----------|--------|-------|
| Input Voltage | V_{IN} | 7 – 36 | V |
| Output Voltage | V_{OUT} | 5 | V |
| Output Current | I_{OUT} | 5 | A |

FEATURES

- Wide 7V-to-36V Operating Input Range
- Guaranteed 5A, Continuous Output Current
- Internal 65mΩ High-Side, 30mΩ Low-Side Power MOSFETs
- Proprietary Switching-Loss-Reduction Technology
- 1.5% Reference Voltage
- Programmable Soft-Start Time
- Low Drop-out Mode
- SCP, OCP, UVP and Thermal Shutdown

APPLICATIONS

- General Consumer
- USB Power Supplies
- Cigarette Lighter Adapters
- Power Supply for Chargers


All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

EV9447-L-00A EVALUATION BOARD




(L x W x H) 2.5" x 2.5" x 0.4"
(6.4cm x 6.4cm x 1.0cm)

| Board Number | MPS IC Number |
|--------------|---------------|
| EV9447-L-00A | MP9447GL |

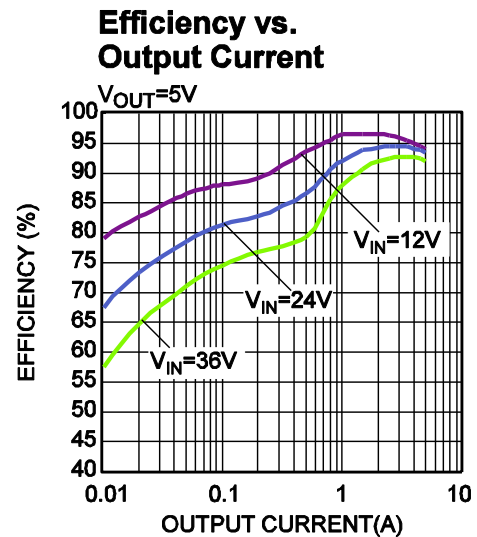

EVALUATION BOARD SCHEMATIC

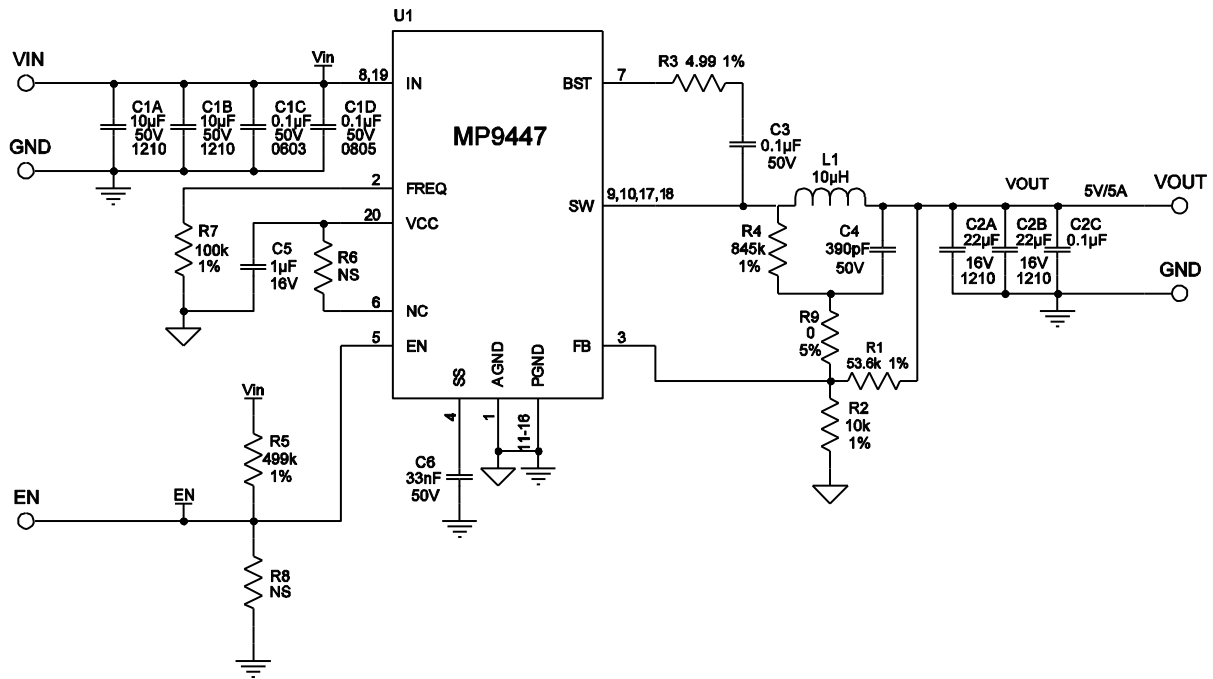

EV9447-L-00A BILL OF MATERIALS

| Qty | RefDes | Value | Description | Package | Manufacturer | Manufacturer_P/N |
|-----|------------|---------------|---------------------------------|-----------|--------------|--------------------|
| 2 | C1A,C1B | 10 μ F | Ceramic Cap., 50V, X7R | 1210 | muRata | GRM32ER71H106KA12L |
| 3 | C1C,C2C,C3 | 0.1 μ F | Ceramic Cap., 50V, X7R | 0603 | muRata | GRM188R71H104KA93D |
| 1 | C1D | 0.1 μ F | Ceramic Cap., 50V, X7R | 0805 | muRata | GRM21BR71H104KA01L |
| 2 | C2A,C2B | 22 μ F | Ceramic Cap., 16V, X7R | 1210 | muRata | GRM32ER71C226KE18L |
| 1 | C4 | 390pF | Ceramic Cap., 50V, C0G | 0603 | muRata | GRM1885C1H391JA01D |
| 1 | C5 | 1 μ F | Ceramic Cap., 16V, X7R | 0603 | muRata | GRM188R71C105KA12D |
| 1 | C6 | 33nF | Ceramic Cap., 50V, X7R | 0603 | muRata | GRM188R71H333KA61D |
| 1 | L1 | 10 μ H | Inductor, 14.4mOhm, 10A | SMD | Würth | 7443321000 |
| | | | Inductor, 16.3m Ω , 8.5A | SMD | Würth | 7443251000 |
| 1 | R1 | 53.6k | Film Res., 1% | 0603 | Yageo | RC0603FR-0753K6L |
| 1 | R2 | 10k | Film Res., 1% | 0603 | Yageo | RC0603FR-0710KL |
| 1 | R3 | 4.99 Ω | Film Res., 1% | 0603 | Yageo | RC0603FR-074R99L |
| 1 | R4 | 845k | Film Res., 1% | 0603 | Yageo | RC0603FR-07845KL |
| 1 | R5 | 499k | Film Res., 1% | 0603 | Yageo | RC0603FR-07499KL |
| 0 | R6,R8 | NS | | | | |
| 1 | R7 | 100k | Film Res., 1% | 0603 | Yageo | RC0603FR-07100KL |
| 1 | R9 | 0 Ω | Film Res., 5% | 0603 | Yageo | RC0603-070RL |
| 1 | U1 | | Step-Down Regulator | QFN20-3x4 | MPS | MP9447GL |


EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 24V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.


Input/Output Ripple

$I_{OUT} = 0A$

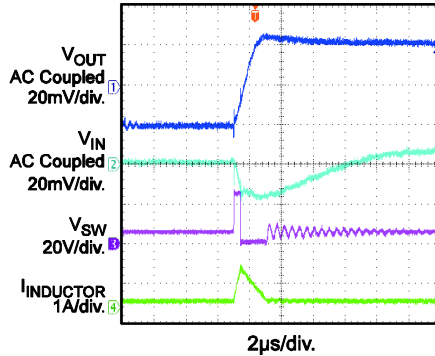


Input/Output Ripple

$I_{OUT} = 5A$

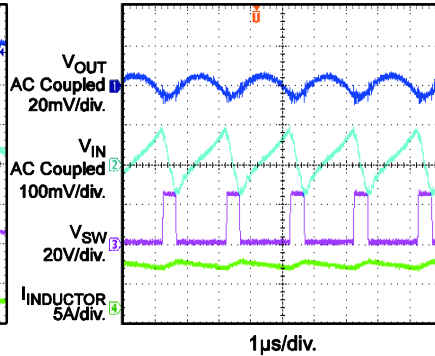


Startup through VIN

$I_{OUT} = 0A$

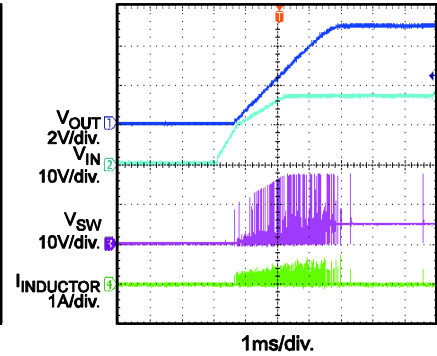


Startup through VIN

$I_{OUT} = 5A$

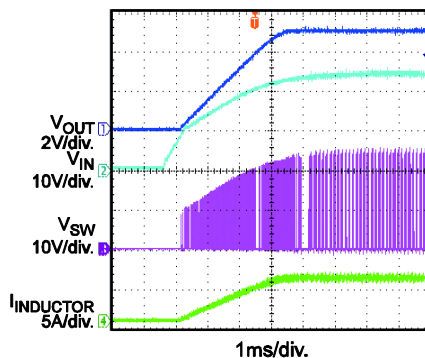


Shutdown through VIN

$I_{OUT} = 0A$

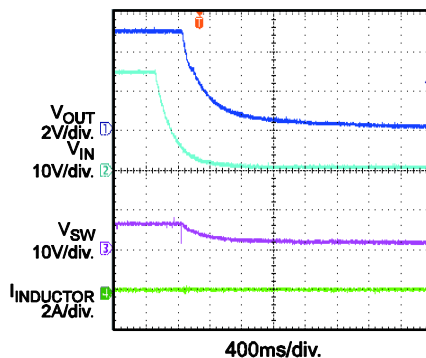


Shutdown through VIN

$I_{OUT} = 5A$

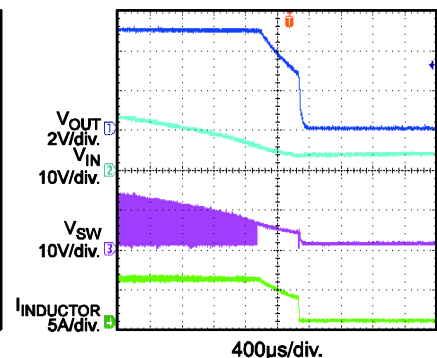


Startup through EN

$I_{OUT} = 0A$

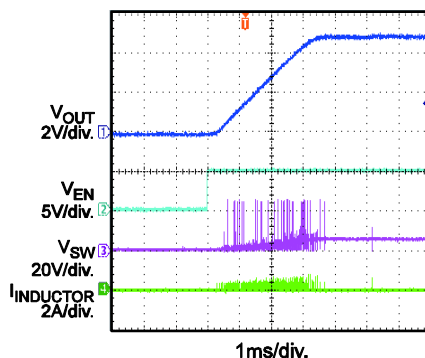


Startup through EN

$I_{OUT} = 5A$

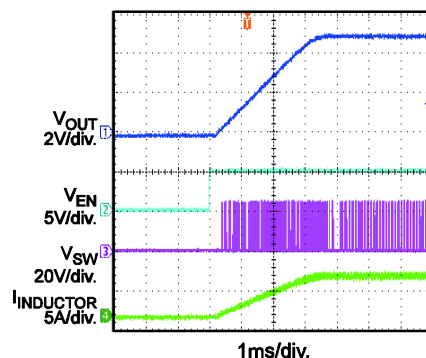

Shutdown through EN

$I_{OUT} = 0A$

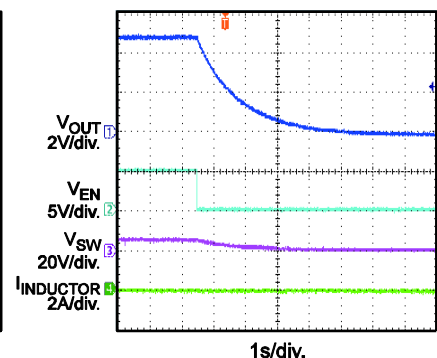


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 24V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through EN

$I_{OUT} = 5A$

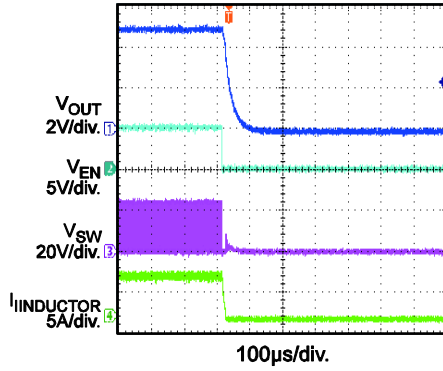


Load Transient

$I_{OUT} = 2.5A$ to $5A$, $250mA/\mu s$

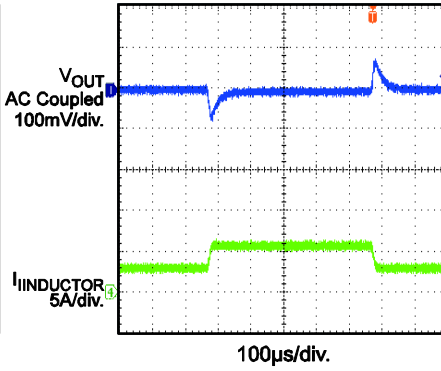


Short Circuit Entry

$I_{OUT} = 0A$

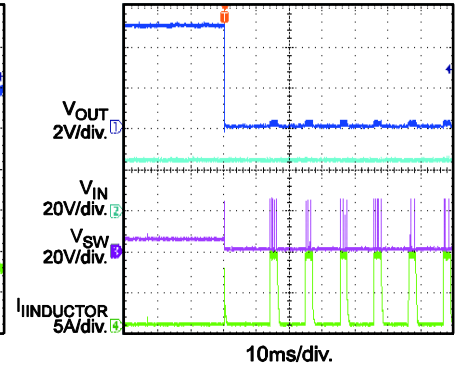


Short Circuit Recovery


$I_{OUT} = 0A$

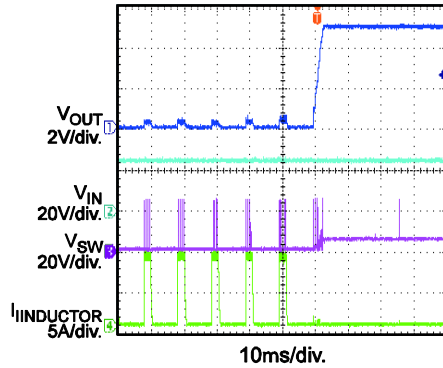

Short Circuit Steady

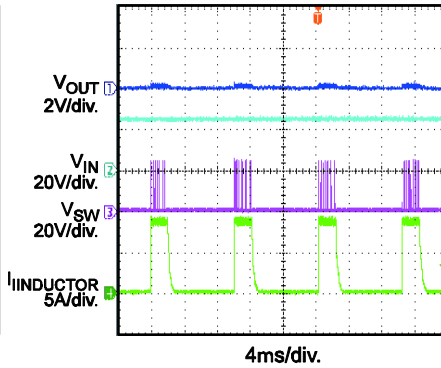

Case Temperature Rise vs. Output Current

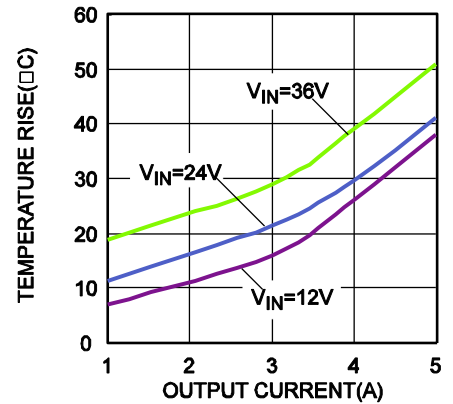

PRINTED CIRCUIT BOARD LAYOUT

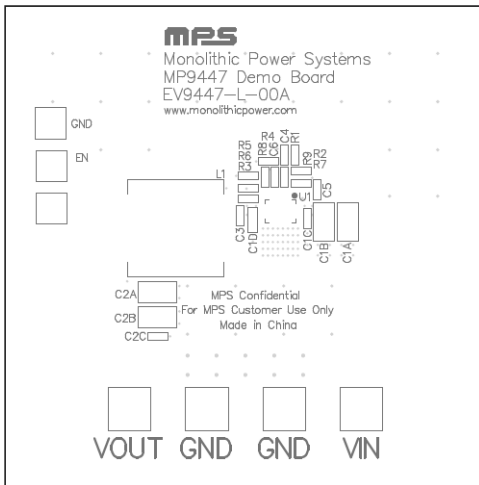


Figure 1—Top Silk Layer

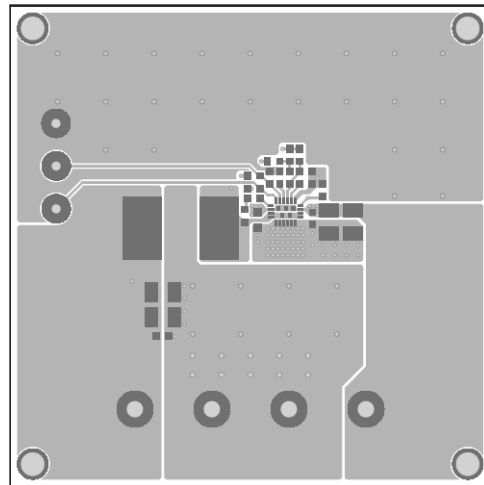


Figure 2—Top Layer

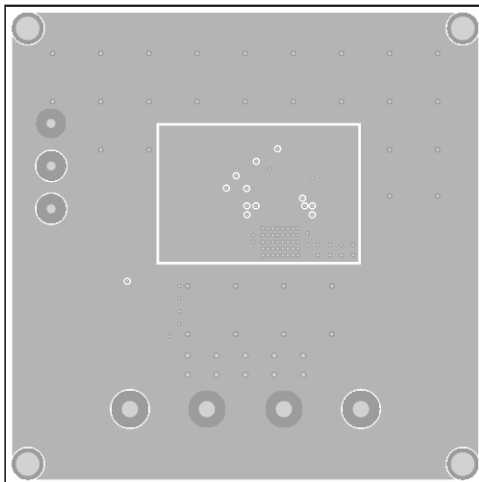


Figure 3—Inner1 Layer

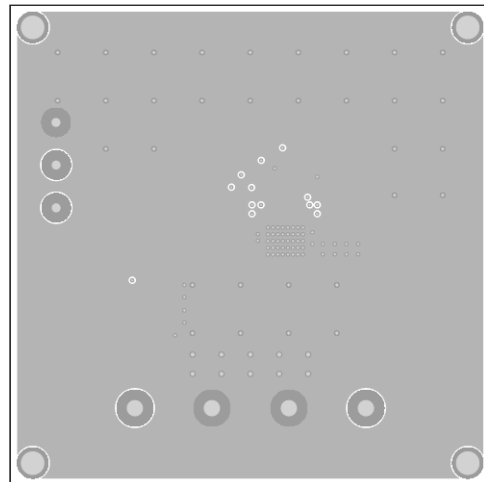


Figure 4—Inner2 Layer

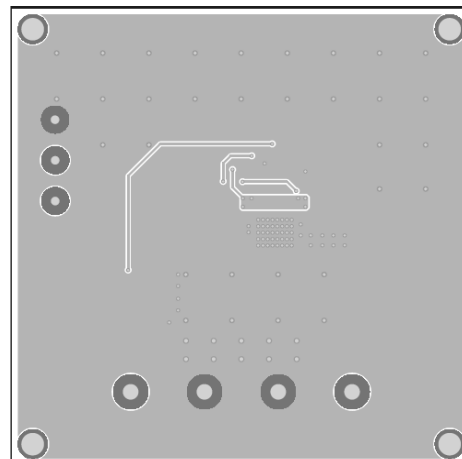


Figure 5—Bottom Layer

QUICK START GUIDE

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output to between 7V and 36V, and then turn it off.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The MP9447GL will automatically startup.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.25V to turn on the regulator, drive EN less than 0.86V to turn it off.
6. An input under voltage lockout (UVLO) function is implemented by the addition of a resistor divider R5 and R8. The EN threshold is 0.86V (falling edge), so V_{IN} UVLO threshold is.
$$0.86 \times \left(1 + \frac{R5}{R8}\right)$$
7. Use R1 and R2 to set the output voltage with $V_{FB} = 0.815V$. For $R2 = 10k\Omega$, R1 can be determined by: $R1 = 12.27 \times (V_{OUT} - 0.815)$ (k Ω). Follow the Application Information section in the device datasheet to recalculate the compensation, inductor and output capacitor values when output voltage is changed.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.