



The Future of Analog IC Technology®

# EVM3811-G-00A

High Efficiency, 1A, 5.5V,  
2.2 MHz Synchronous Step-down Switcher  
with Integrated Inductor

## DESCRIPTION

The MPM3811 is a monolithic step-down switch mode converter with built-in power MOSFETs and inductor. The DC-DC module has a small surface mount 2mm x 2mm QFN package. It achieves 1A continuous output current from a 2.3V to 5.5V input voltage with excellent load and line regulation. The MPM3811 is ideal for a wide range of applications including high performance DSPs, wireless power, portable and mobile Devices, and other low-power systems. The output voltage can be regulated as low as 0.6V. Only input, output capacitors and FB resistors are needed to complete the design.

The Constant-On-time (COT) control scheme provides fast transient response, high efficiency at light-load and easy loop compensation.

The MPM3811 features fault protection functions including cycle-by-cycle current limit and thermal shutdown.

The MPM3811 requires a minimum number of readily available standard external components and is available in an ultra-small QFN10 (2mmx2mmx1.6mm) package.

## ELECTRICAL SPECIFICATION

| Parameter      | Symbol           | Value     | Units |
|----------------|------------------|-----------|-------|
| Input Voltage  | V <sub>IN</sub>  | 2.3 – 5.5 | V     |
| Output Voltage | V <sub>OUT</sub> | 1.2       | V     |
| Output Current | I <sub>OUT</sub> | 1         | A     |

Note: V<sub>IN</sub><3.3V may need more input capacitor.

## FEATURES

- Up to 91% Peak Efficiency
- Wide 2.3V to 5.5V Operating Input Range
- Output Voltage as Low as 0.6V
- 100% Duty Cycle in Dropout
- 1A Output Current
- 120mΩ and 80mΩ Internal Power MOSFET.
- 2.2MHz Frequency
- EN for Power Sequencing
- Cycle-by-Cycle Over Current Protection
- 0.5ms Internal Soft-Start Time
- Output Discharge
- Short Circuit Protection with Hiccup Mode
- Thermal Shutdown
- Stable with Low ESR Output Ceramic Capacitors
- Available in a QFN10 (2mmx2mmx1.6mm) Package

## APPLICATIONS

- Wireless/Networking Cards
- Portable and Mobile Devices
- Battery Powered Devices
- Low Voltage I/O System Power


All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.


"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

## EVM3811-G-00A EVALUATION BOARD



| Board Number  | MPS IC Number |
|---------------|---------------|
| EVM3811-G-00A | MPM3811GG     |

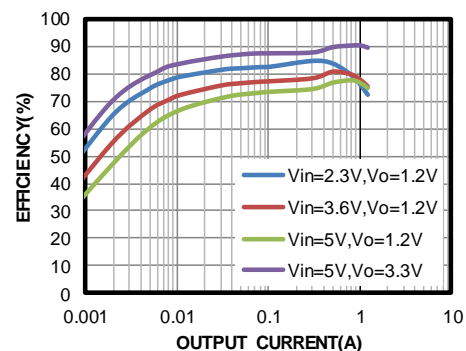

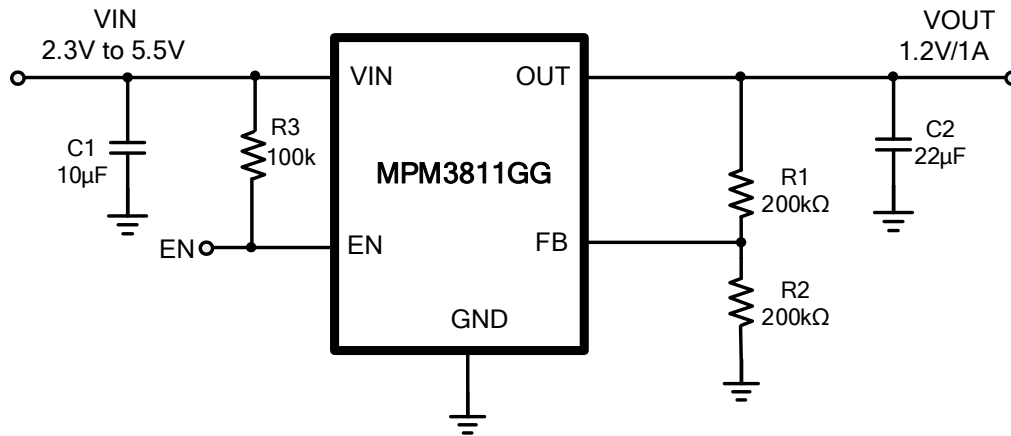**EVALUATION BOARD SCHEMATIC**

**Figure 1—Schematic of EVM3811GG**

 Note:  $V_{IN} < 3.3V$  may need more input capacitor.

**EVM3811-G-00A BILL OF MATERIALS**

| Qty | RefDes | Value   | Description          | Package | Manufacturer | Manufacturer P/N   |
|-----|--------|---------|----------------------|---------|--------------|--------------------|
| 2   | R1, R2 | 200kΩ   | Film Res,1%          | 0402    | Any          | Any                |
| 1   | R3     | 100kΩ   | Film Res,1%          | 0402    | Any          | Any                |
| 1   | C1     | 10µF    | Ceramic Cap,6.3V,X5R | 0603    | muRata       | GRM188R60J475KE19D |
| 1   | C2     | 22µF    | Ceramic Cap,6.3V,X5R | 0603    | TDK          | C1608X5R0J226M     |
| 1   | U1     | MPM3811 |                      | 2mmx2mm | MPS          | MPM3811GG          |


## EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$ ,  $V_{OUT} = 1.2V$ ,  $C_o = 22\mu F$ ,  $T_A = +25^\circ C$ , unless otherwise noted.


### Steady State

$I_{OUT} = 0A$

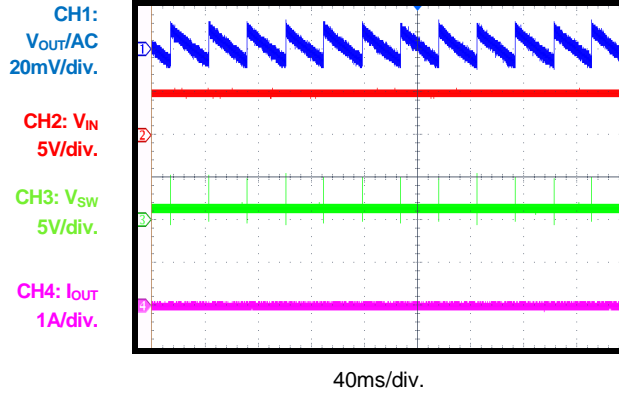


### Steady State

$I_{OUT} = 1A$

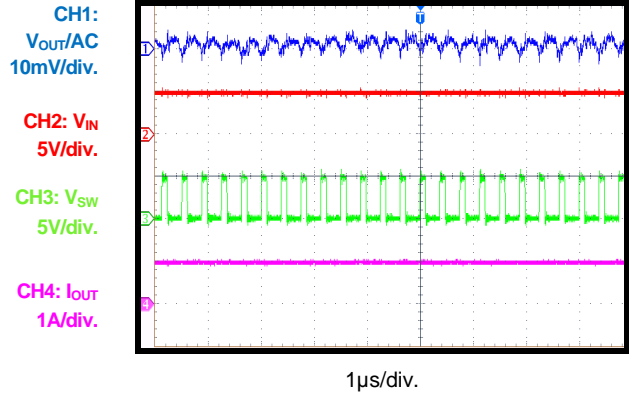


### Transient

$I_{OUT} = 0A-1A$

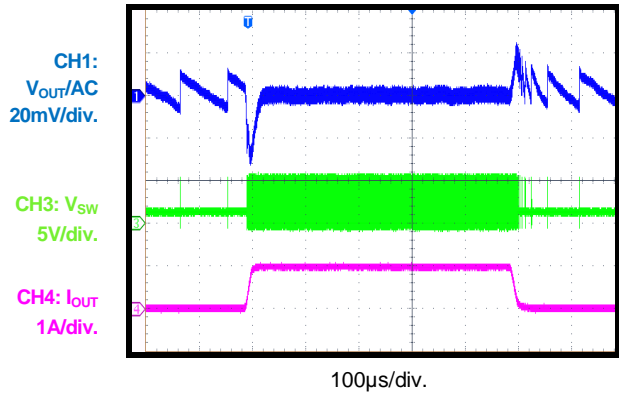


### Transient

$I_{OUT} = 0.5A-1A$

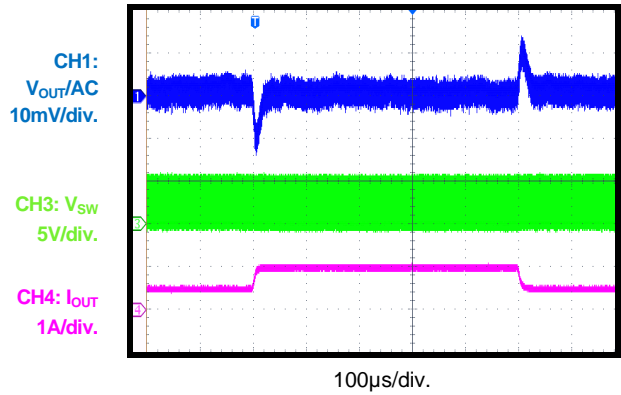


### EN ON

$I_{OUT} = 0A$

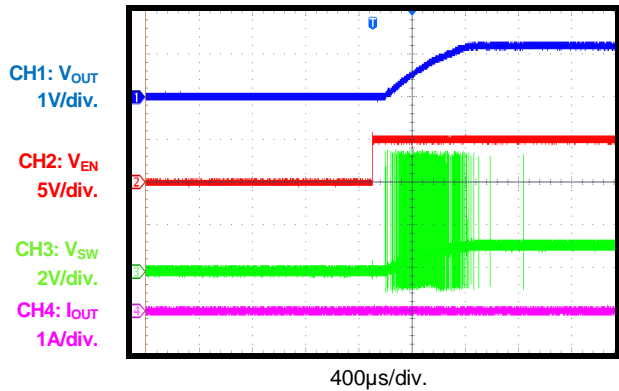

### EN ON







$I_{OUT} = 1A$

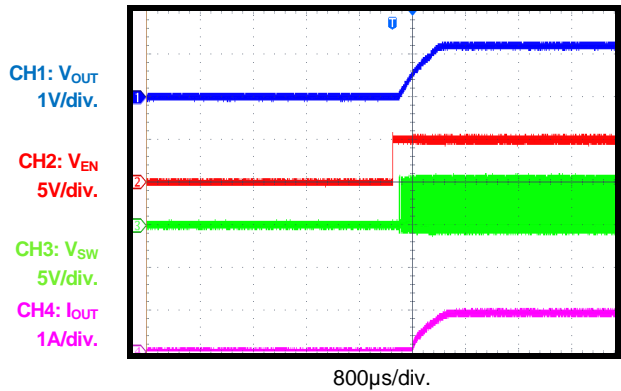

## EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$ ,  $V_{OUT} = 1.2V$ ,  $C_o = 22\mu F$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

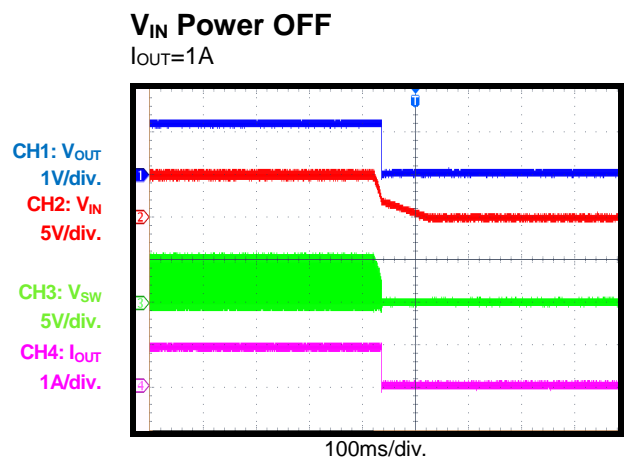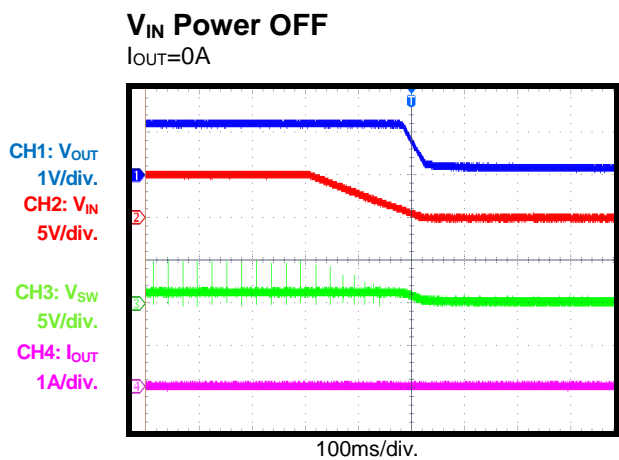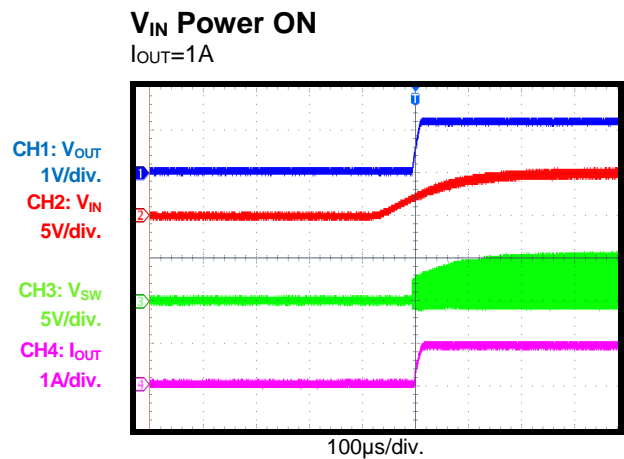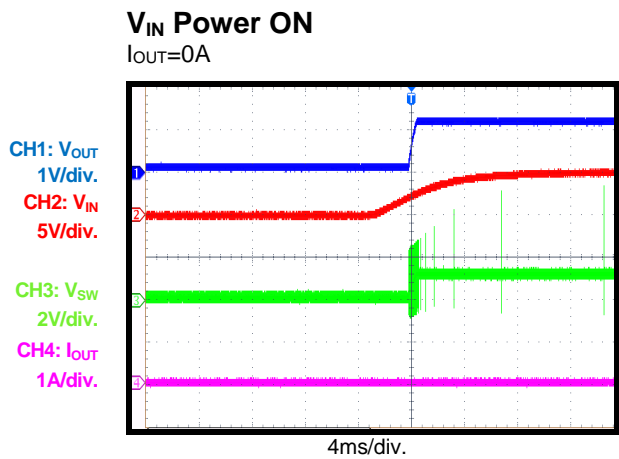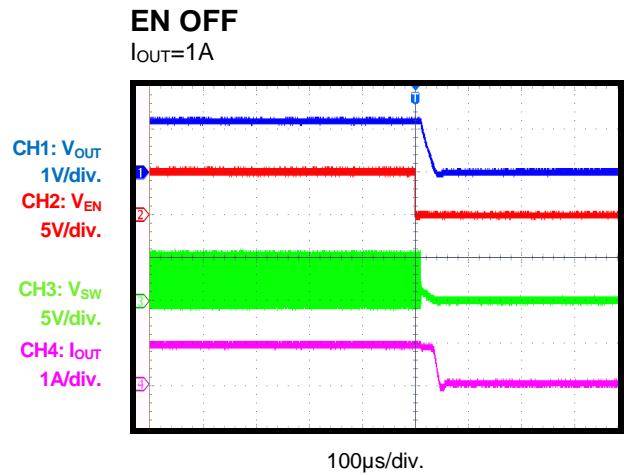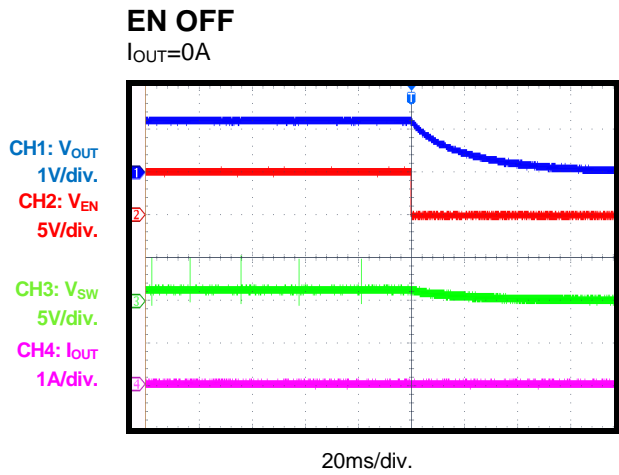


## EVB TEST RESULTS (continued)


Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$ ,  $V_{OUT} = 1.2V$ ,  $L = 1.0\mu H$ ,  $C_o = 22\mu F$ ,  $T_A = +25^\circ C$ , unless otherwise noted.


Short Circuit Entry

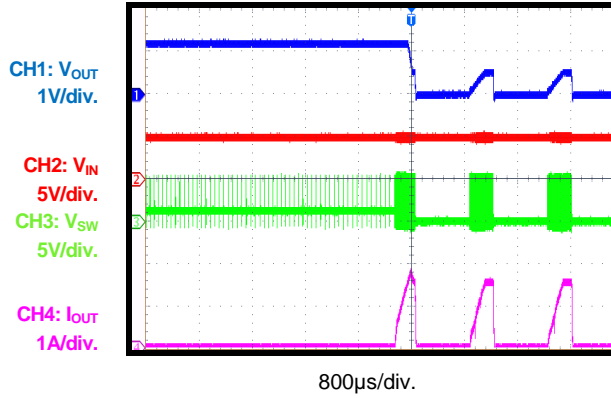

Short Circuit Steady

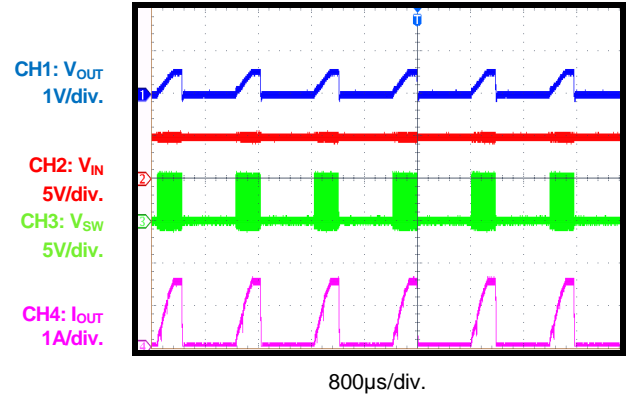

Short Circuit Recovery

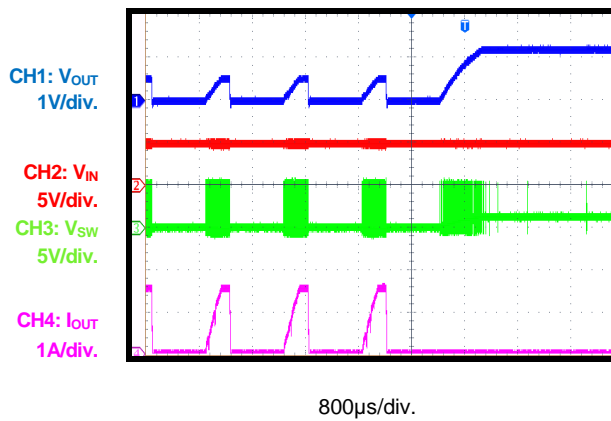

## PRINTED CIRCUIT BOARD LAYOUT

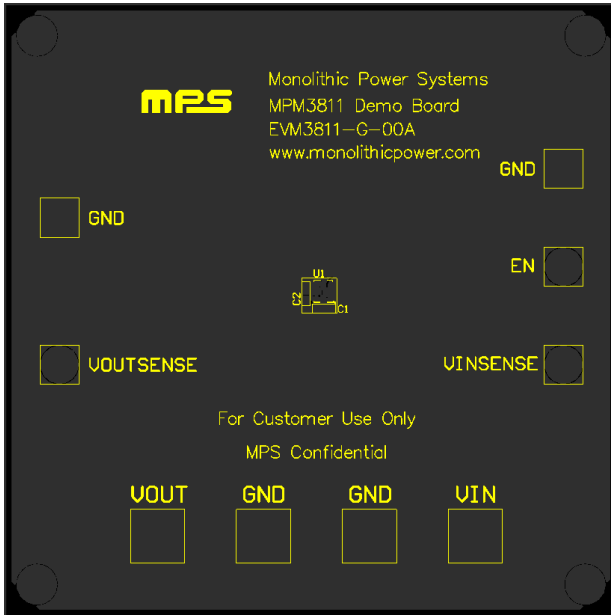


Figure 2—Top Silk Layer

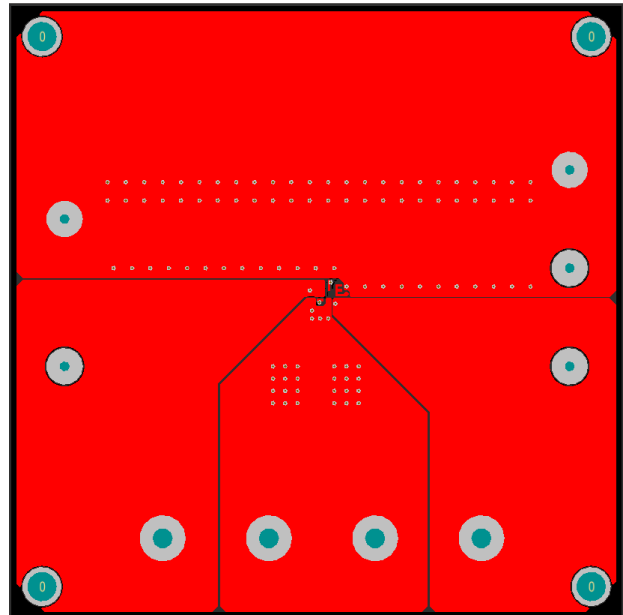


Figure 3—Top Layer

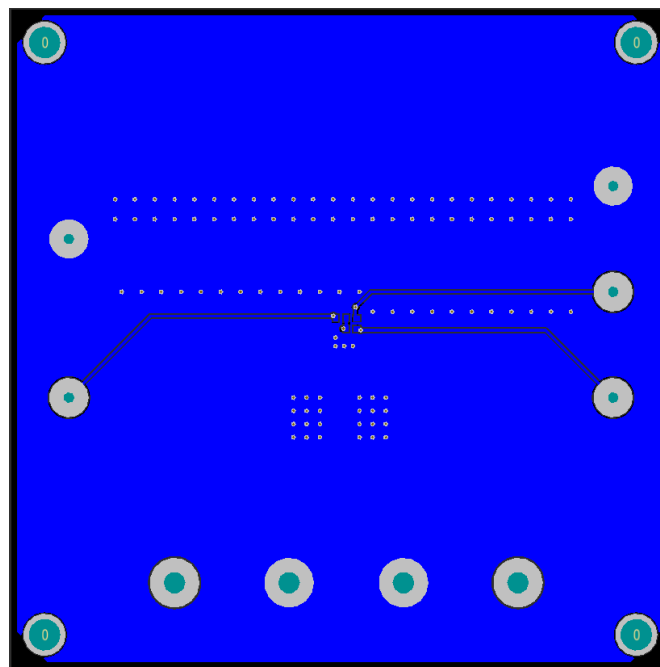


Figure 4—Bottom Layer

## QUICK START GUIDE

The output voltage of this board is set externally which can be regulated as low as 0.6V by operating from +2.3V to +5.5V input as the Figure 1. The default output voltage of this board is set to 1.2V.

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output between 2.3V and 5.5V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The board will automatically start up.
5. The Output Voltage can be changed by varying R2. Choose R1 to be around 40kΩ to 200kΩ. R2 is then given by:

$$R2 = \frac{R1}{\frac{V_{out}}{0.6} - 1}$$

Example: For Vout= 1.8V, R1=200kΩ, R2=100kΩ.

6. For fixed output version, just need replace IC and remove the feedback resistor R1&R2.

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.