



MPQ5077A

5.5V, 7A, Low- $R_{DS(ON)}$ Load Switch
with Configurable Current Limit,
AEC-Q100 Qualified

DESCRIPTION

The MPQ5077A is a configurable load switch that provides up to 7A of load protection across a 1.2V to 5.5V input voltage (V_{IN}) range. With low on resistance ($R_{DS(ON)}$) in a tiny package, the MPQ5077A offers a highly efficient, space-saving solution for automotive infotainment, clusters, and advanced driver-assistance system (ADAS) applications.

The MPQ5077A's soft start (SS) function avoids inrush current during circuit start-up. The MPQ5077A also provides a configurable soft-start time (t_{SS}), output discharge functions, over-current protection (OCP), and thermal shutdown.

The maximum load at the output source is current-limited, which is accomplished utilizing a sense MOSFET topology. The current limit magnitude is controlled by an external resistor from the ILIM pin to ground.

An internal charge pump drives the power device gate, allowing a very low- $R_{DS(ON)}$ DMOS power MOSFET of only 10m Ω .

The MPQ5077A is available in a tiny QFN-13 (2.5mmx3mm) package.

FEATURES

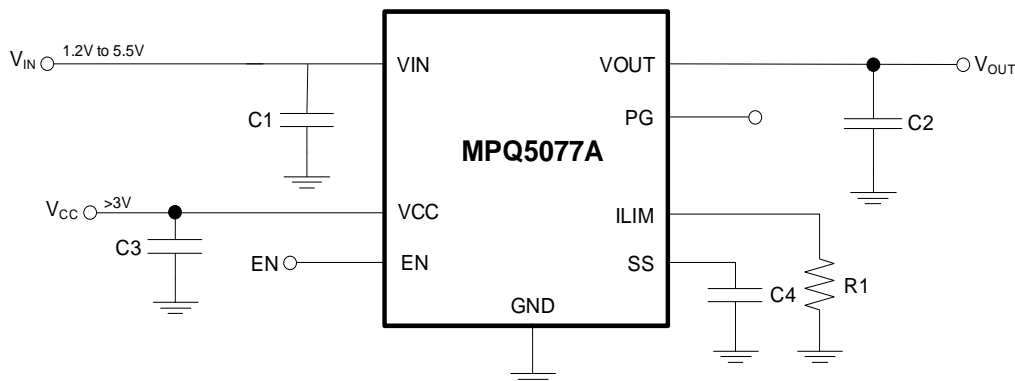
- Guaranteed Industrial/Automotive Temperature Range
- Integrated 10m Ω , Low- $R_{DS(ON)}$ MOSFET
- Adjustable Start-Up Slew Rate
- Wide 1.2V to 5.5V V_{IN} Range
- <1 μ A Shutdown Current
- Configurable 7A Current Limit (I_{LIMIT})
- Output Discharge
- Enable (EN) Pin
- <200ns Short-Circuit Protection (SCP) Response
- Push-Pull Power Good (PG) Indicator
- Thermal Protection
- Available in a Small, Space-Saving QFN-13 (2.5mmx3mm) Package
- Available in AEC-Q100 Grade 1

APPLICATIONS

- Automotive Infotainment
- Automotive Clusters
- Automotive Advanced Driver-Assistance Systems (ADAS)
- Industrial Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

TYPICAL APPLICATION



ORDERING INFORMATION

Part Number*	Package	Top Marking	MSL Rating
MPQ5077AGQBE-AEC1	QFN-13 (2.5mmx3mm)	See Below	1

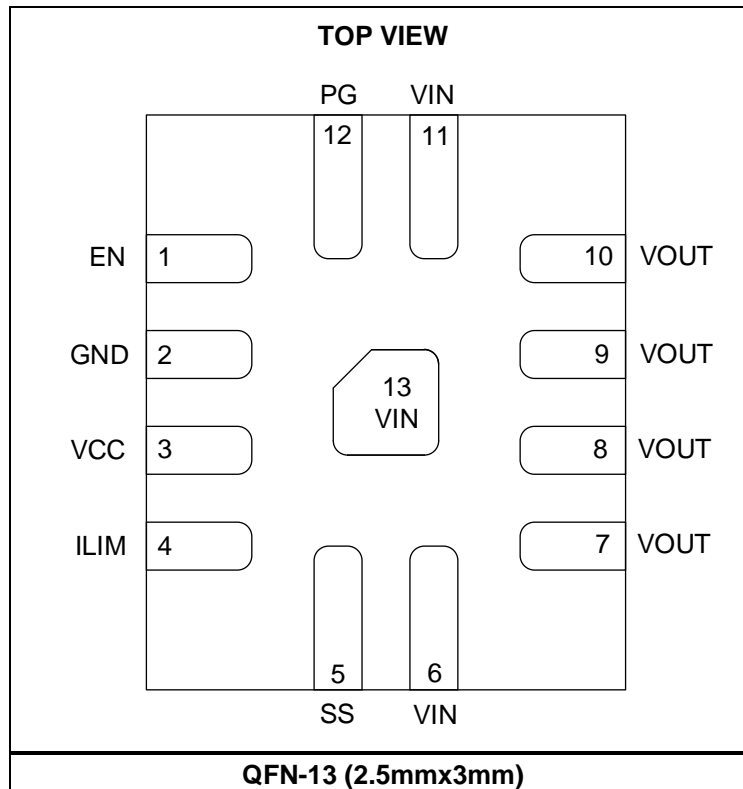
* For Tape & Reel, add suffix -Z (e.g. MPQ5077AGQBE-AEC1-Z).

TOP MARKING

BTB
YWW
LLL

BTB: Product code of MPQ5077AGQBE-AEC1
 Y: Year code
 WW: Week code
 LLL: Lot number

PACKAGE REFERENCE



PIN FUNCTIONS

Pin #	Name	Description
1	EN	Enable. Pull the EN pin below the specified threshold (1.5V) to shut down the chip.
2	GND	Ground.
3	VCC	Supply voltage to the control circuitry.
4	ILIM	Output current limit configuration. Place a resistor to ground to set the overload current limit.
5	SS	Soft start. An external capacitor connected to the SS pin sets the slew rate for the output voltage (V _{OUT}) soft-start period.
6, 11, 13	VIN	Input power supply.
7, 8, 9, 10	VOUT	Output to the load.
12	PG	Power good. The PG pin is the push-pull output that is triggered by the voltage gap, V _{IN} to V _{OUT} > 200mV, or over-current (OC) limit warning.

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

Input voltage (V _{IN})	-0.3V to +6.5V
Supply voltage (V _{CC})	-0.3V to +6.5V
Output voltage (V _{OUT})	-0.3V to +6.5V
Enable voltage (V _{EN})	-0.3V to +6.5V
SS, ILIM	-0.3V to V _{CC} + 0.3V
Junction temperature (T _J)	150°C
Lead temperature	260°C
Storage temperature	-65°C to +150°C
Continuous power dissipation ⁽²⁾	
QFN-13 (2.5mmx3mm)	2W

ESD Ratings

Human body model (HBM)	±2kV
Charged-device model (CDM)	±750V

Recommended Operating Conditions ⁽³⁾

Input voltage (V _{IN})	1.2V to 5.5V
Supply voltage (V _{CC})	3V to 5.5V
Output voltage (V _{OUT})	1.2V to 5.5V
Operating junction temp (T _J)	-40°C to +125°C

Thermal Resistance ⁽⁴⁾	θ_{JA}	θ_{JC}
QFN-13 (2.5mmx3mm)	49	5.3

Notes:

- Exceeding these ratings may damage the device.
- The maximum allowable power dissipation is a function of the maximum junction temperature, T_J (MAX), the junction-to-ambient thermal resistance, θ_{JA}, and the ambient temperature, T_A. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P_D (MAX) = (T_J (MAX) - T_A) / θ_{JA}. Exceeding the maximum allowable power dissipation can produce an excessive die temperature, which may cause the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- The device is not guaranteed to function outside of its operating conditions.
- Measured on a JESD51-7, 4-layer PCB.

ELECTRICAL CHARACTERISTICS

$V_{IN} = 3.6V$, $V_{CC} = 3.6V$, $T_J = -40^{\circ}C$ to $+125^{\circ}C$, typical values are at $T_J = 25^{\circ}C$, unless otherwise noted.







Parameters	Symbol	Condition	Min	Typ	Max	Units	
Input and Supply Voltage Range							
Input voltage	V_{IN}		1.2		5.5	V	
Supply voltage	V_{CC}		3		5.5	V	
Supply Current							
Off-state leakage current	I_{OFF}	$V_{IN} = 5V$, $EN = 0$	$T_J = 25^{\circ}C$		0.05	0.2	μA
			$T_J = -40^{\circ}C$ to $+125^{\circ}C$			50	
V_{CC} standby current	I_{STBY}	$V_{CC} = 5V$, $EN = 0$		0.01	1	μA	
		$V_{CC} = 5V$, enable, no load		220	330		
Power MOSFET							
On resistance	$R_{DS(ON)}$	$V_{CC} = 5V$		6.5	13	$m\Omega$	
		$V_{CC} = 3.3V$		8.5	16		
Thermal Shutdown and Recovery							
Shutdown temperature ⁽⁵⁾	T_{STD}			155		$^{\circ}C$	
Hysteresis ⁽⁵⁾	T_{HYS}			30		$^{\circ}C$	
Under-Voltage Protection (UVP)							
V_{CC} under-voltage lockout (UVLO) threshold	V_{CC_UVLO}	UVLO rising threshold		2.5	2.8	V	
UVLO hysteresis	V_{UVLO_HYS}			200		mV	
Soft Start (SS)							
SS pull-up current	I_{SS}			9		μA	
Enable (EN)							
EN rising threshold	V_{EN_H}		1.3	1.5	1.7	V	
EN hysteresis	V_{EN_HYS}			400		mV	
Current Limit							
Current limit	I_{LIMIT}	$R_{LIMIT} = 50k\Omega$, ramping I_{LIMIT} records peak current limit	1.36	1.7	2.04	A	
		$R_{LIMIT} = 11k\Omega$ ⁽⁵⁾		7			
Current limit warning		$R_{LIMIT} = 50k\Omega$	1.28	1.6	1.92		
Current limit voltage	V_{ILIM}	$R_{LIMIT} = 50k\Omega$		0.974		V	
Sense ratio		$R_{LIMIT} = 50k\Omega$		87000			
Discharge Resistance							
Discharge resistance	R_{DIS}			200		Ω	
Power Good (PG)							
PG rising threshold	V_{PG_R}	Voltage gap between V_{OUT} and V_{IN}		150		mV	
PG hysteresis	V_{PG_H}			50		mV	
PG delay	V_{PG_D}	Low to high		70		μs	
PG high	V_{PG_H}	$V_{CC} = 3.3V$	3.2			V	
PG low	V_{PG_L}	Sink 1mA			0.2	V	







Note:

5) Guaranteed by characterization. Not tested in production.







TYPICAL CHARACTERISTICS

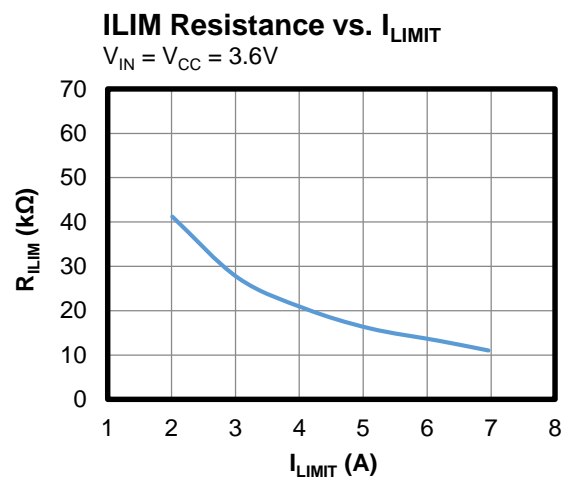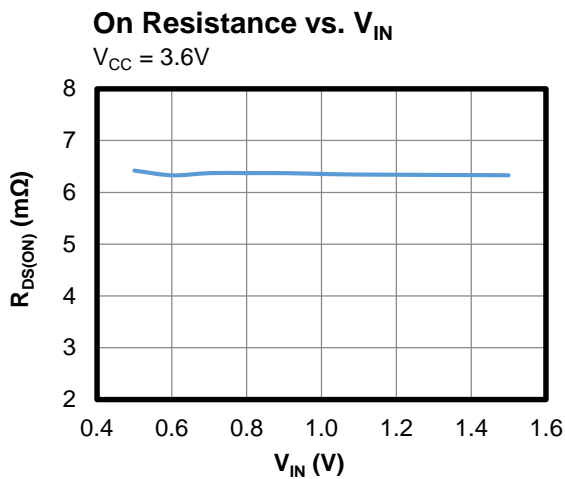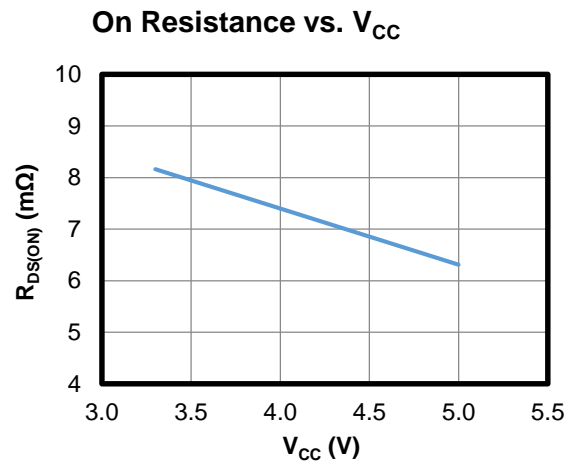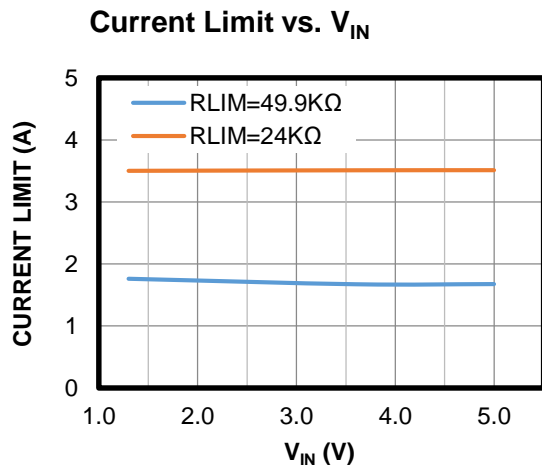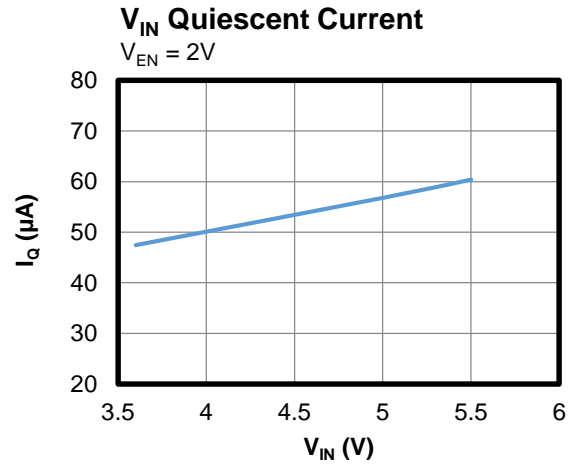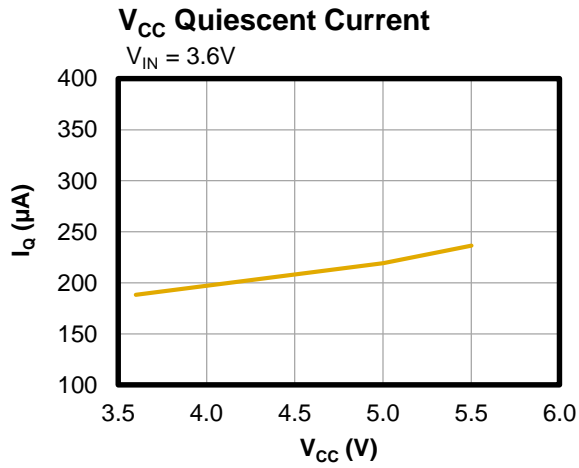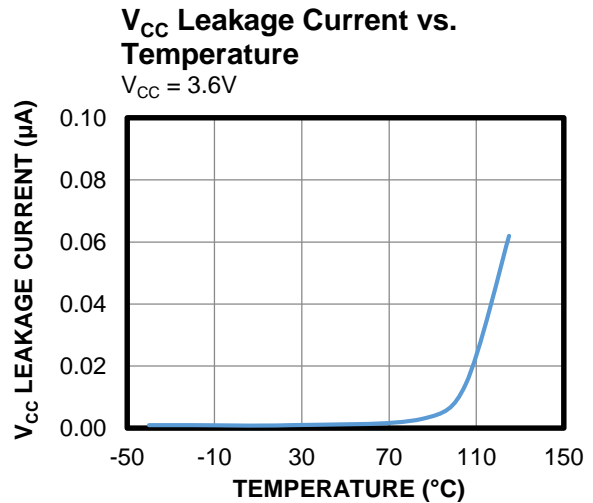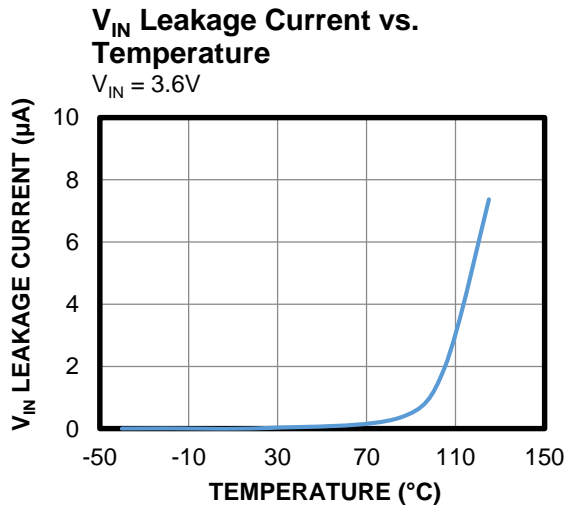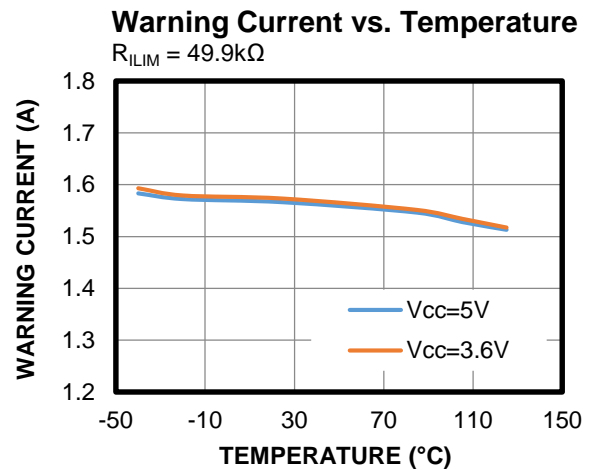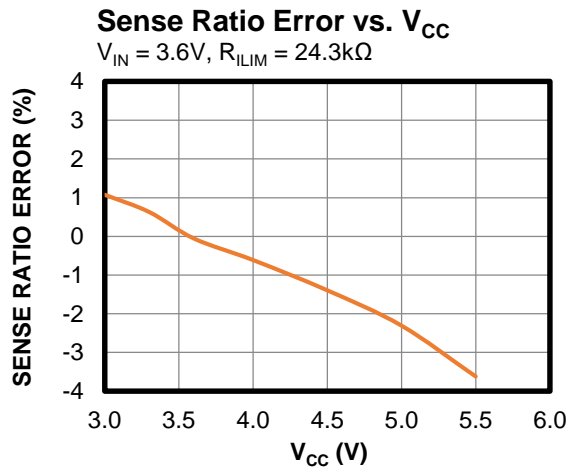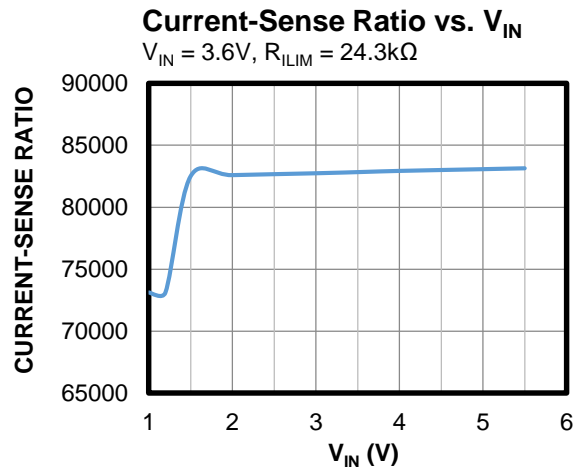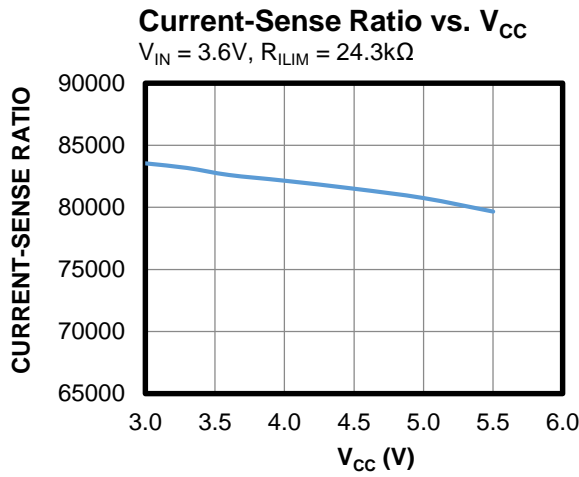$V_{IN} = 3.6V$, $V_{CC} = 3.6V$, $R_{ILIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.





TYPICAL CHARACTERISTICS (continued)
 $V_{IN} = 3.6V$, $V_{CC} = 3.6V$, $R_{ILIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

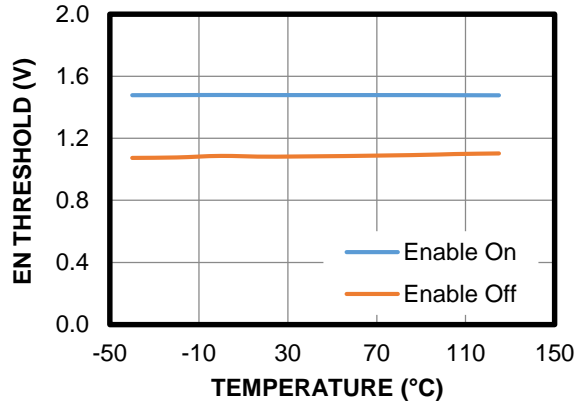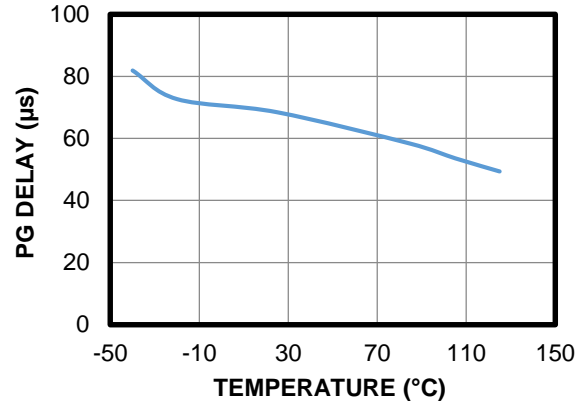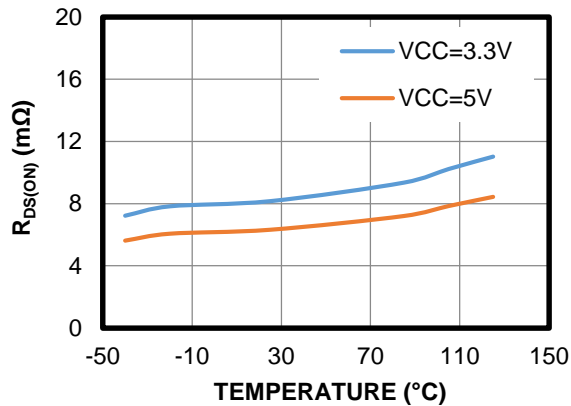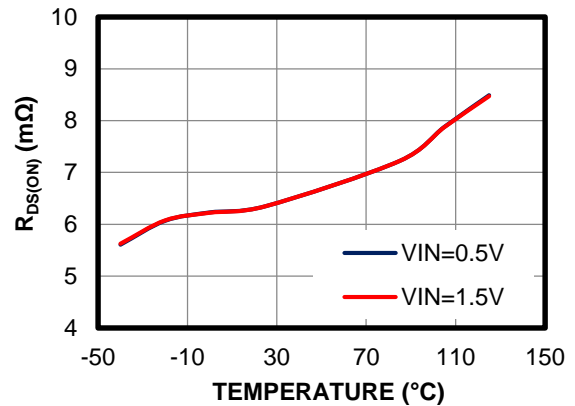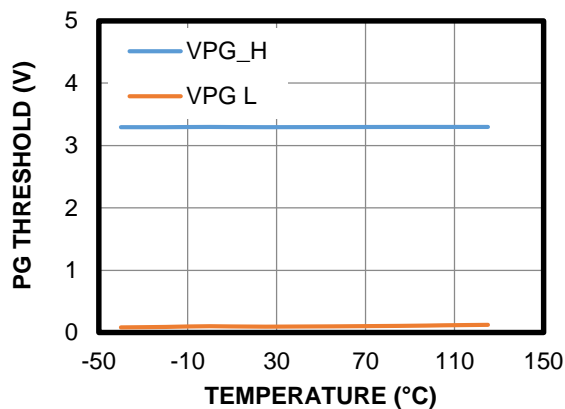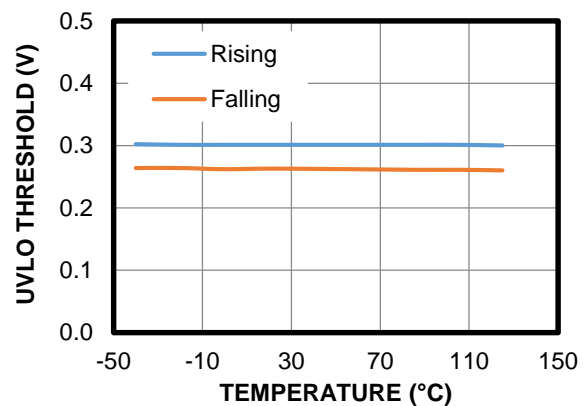
TYPICAL CHARACTERISTICS (continued)
 $V_{IN} = 3.6V$, $V_{CC} = 3.6V$, $R_{LIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

EN Threshold vs. Temperature

PG Delay vs. Temperature

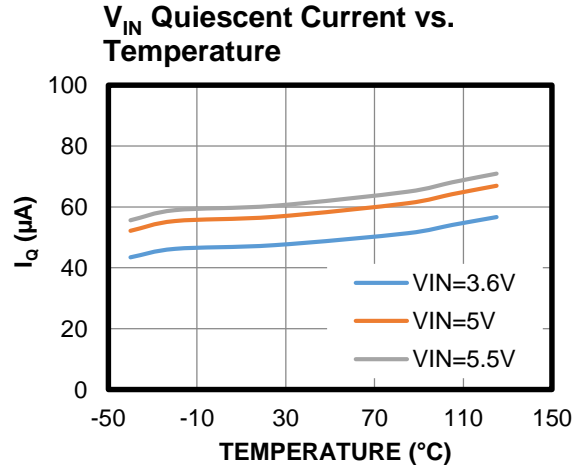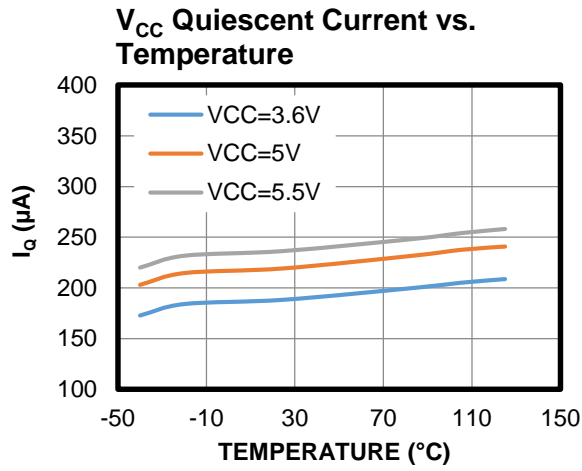On Resistance vs. Temperature

On Resistance vs. Temperature
 $V_{CC} = 3.6V$

PG Threshold vs. Temperature

UVLO Threshold vs. Temperature


TYPICAL CHARACTERISTICS (continued)

$V_{IN} = 3.6V$, $V_{CC} = 3.6V$, $R_{LIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

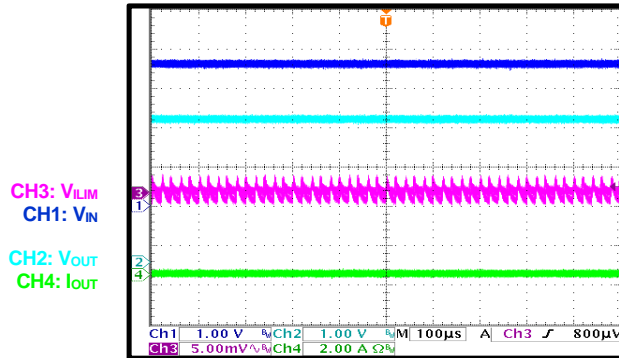


TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 3.6V$, $V_{EN} = 3.6V$, $R_{LIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.


Steady State

$V_{IN} = V_{CC} = 3.6V$, $V_{EN} = 4V$, $I_{OUT} = 0A$




Steady State

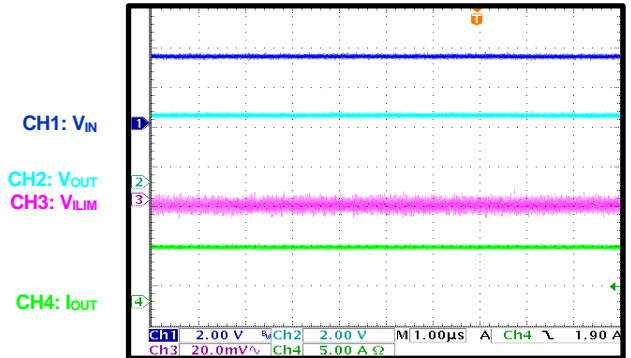$V_{IN} = V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$




Steady State

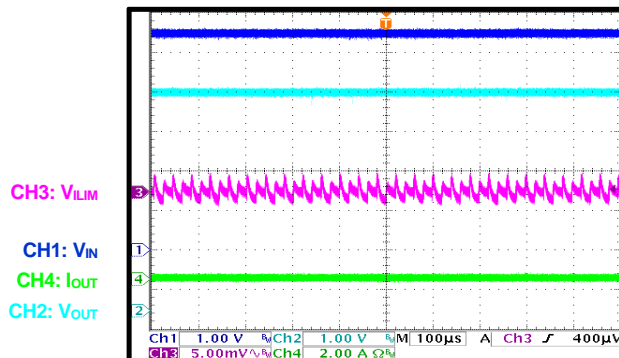$V_{IN} = 5.5V$, $V_{CC} = 3.6V$, $V_{EN} = 4V$, $I_{OUT} = 0A$




Steady State

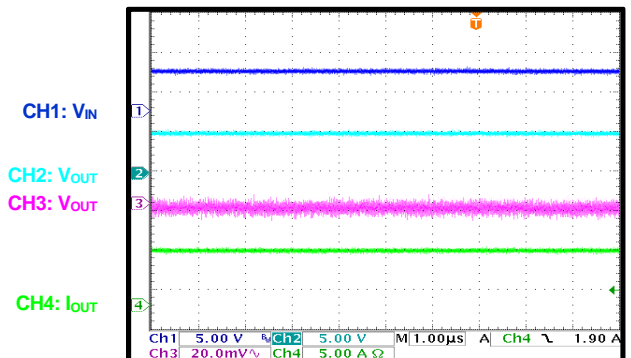$V_{IN} = 5.5V$, $V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$




Start-Up

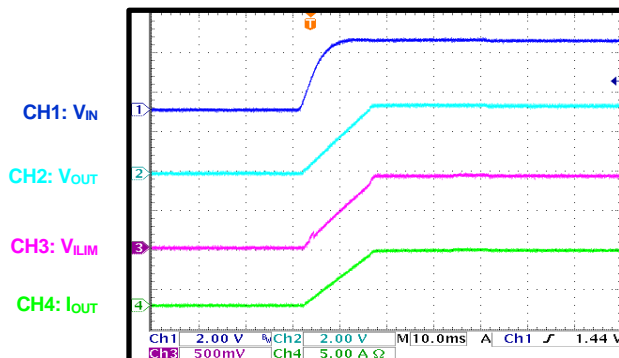$V_{IN} = V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$









Shutdown






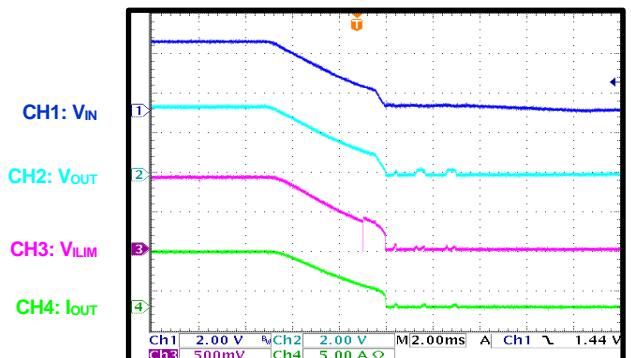
$V_{IN} = V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$



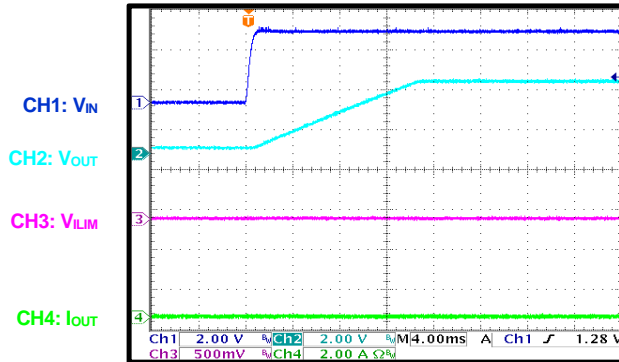
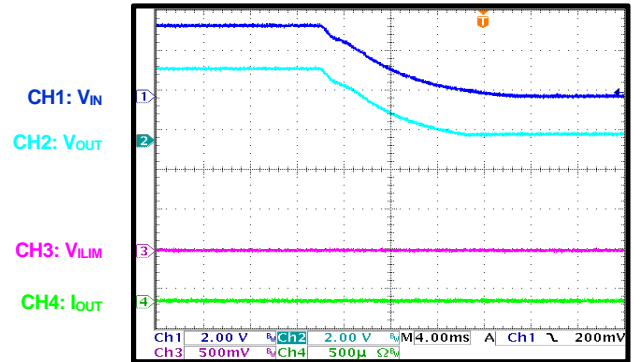
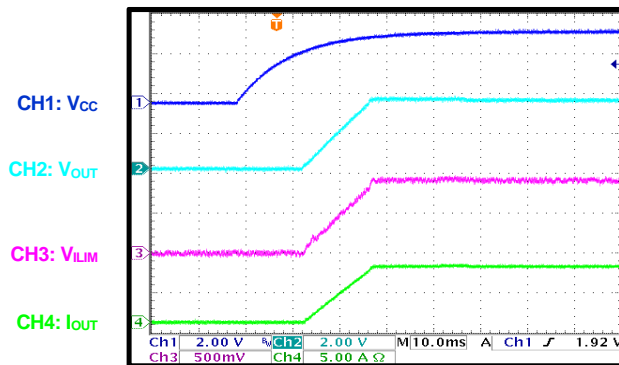
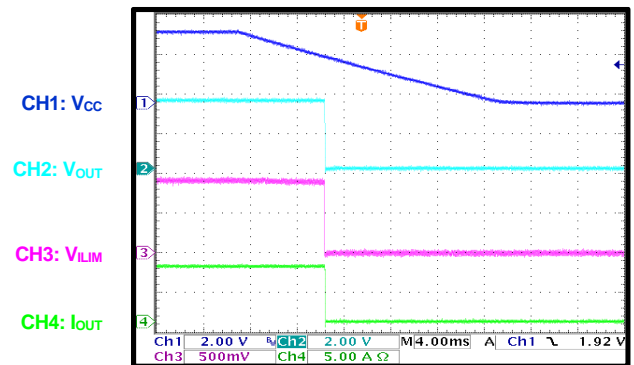
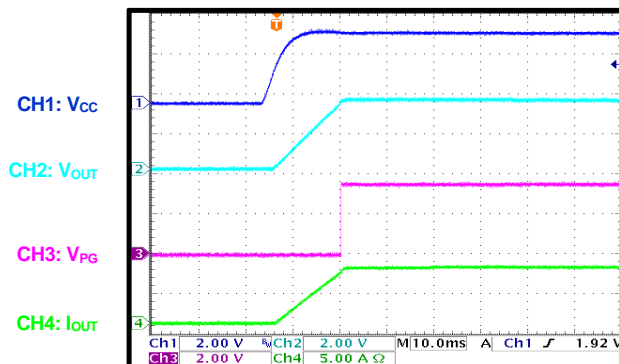
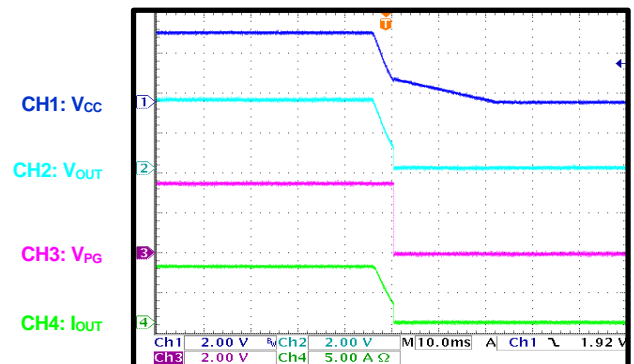
TYPICAL PERFORMANCE CHARACTERISTICS (continued)
 $V_{IN} = 3.6V$, $V_{EN} = 3.6V$, $R_{LIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

Start-Up
 $V_{IN} = V_{CC} = 3.6V$, $V_{EN} = 4V$, $I_{OUT} = 0A$

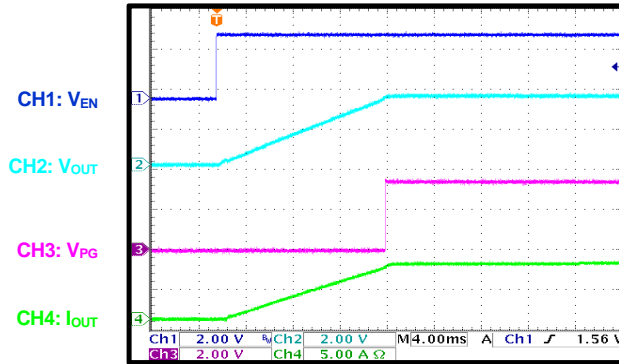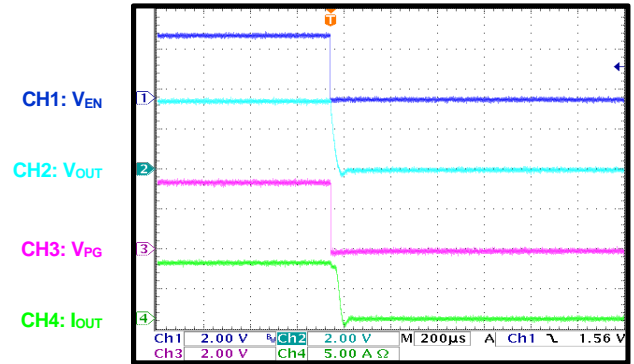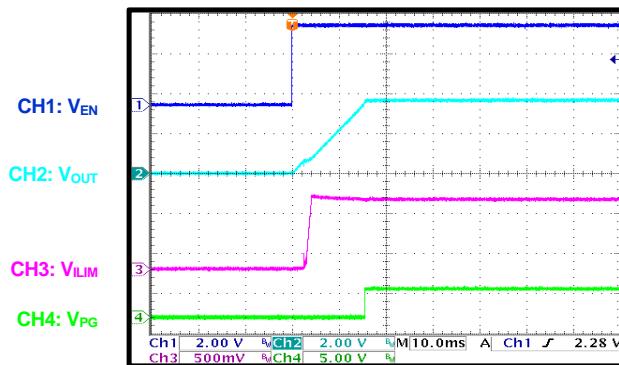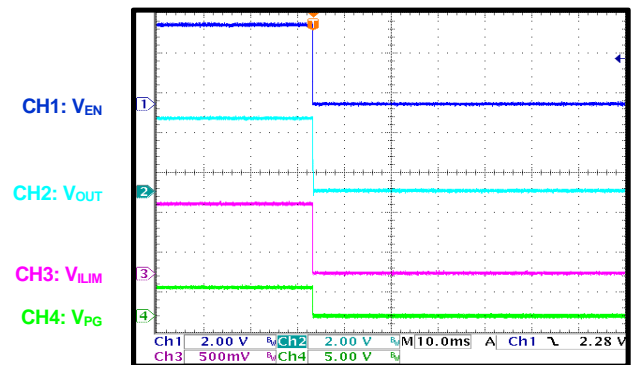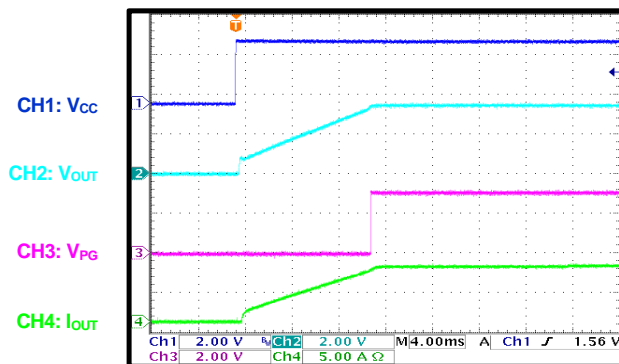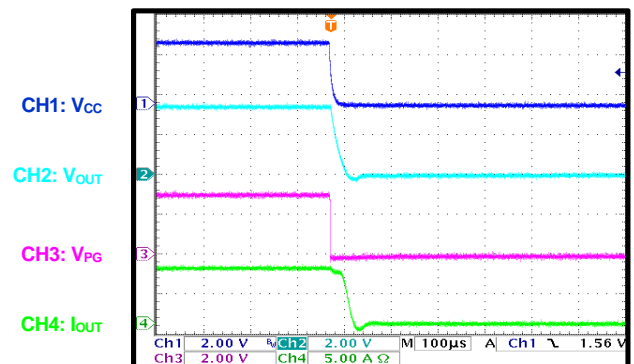Shutdown
 $V_{IN} = V_{CC} = 3.6V$, $V_{EN} = 4V$, $I_{OUT} = 0A$

Start-Up through VCC
 $V_{IN} = V_{EN} = 3.6V$, $V_{CC} = 3.6V$, $I_{OUT} = 7A$

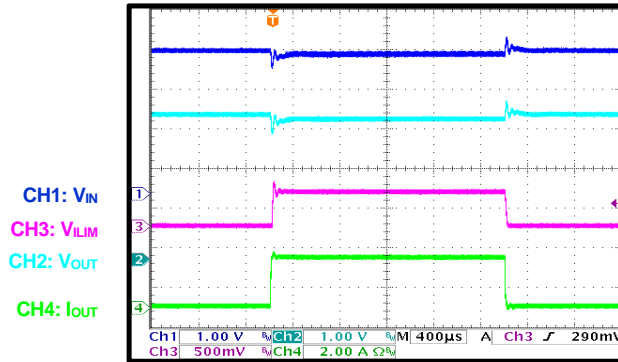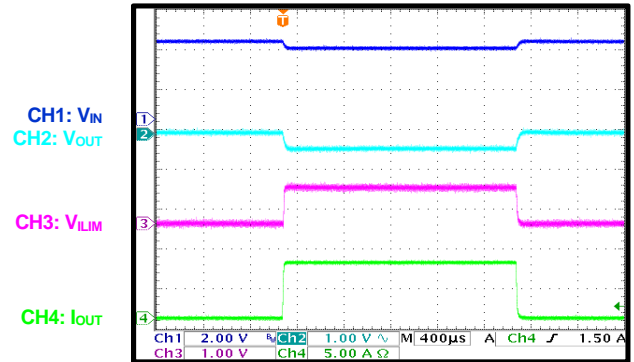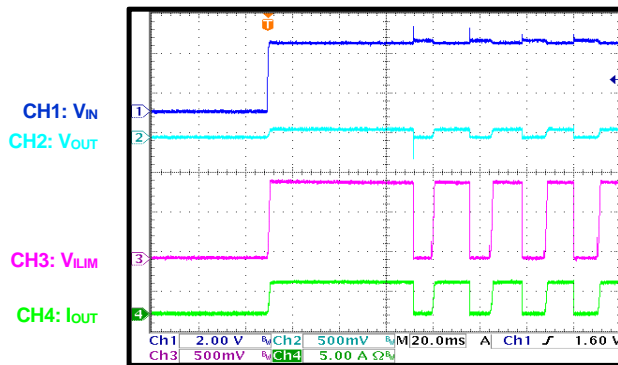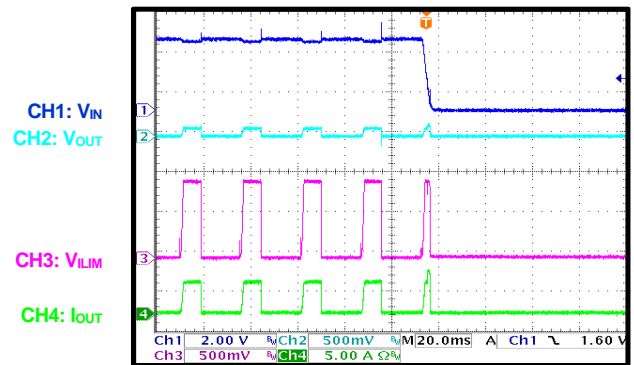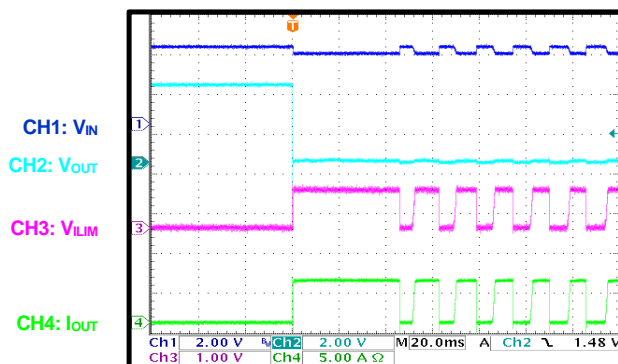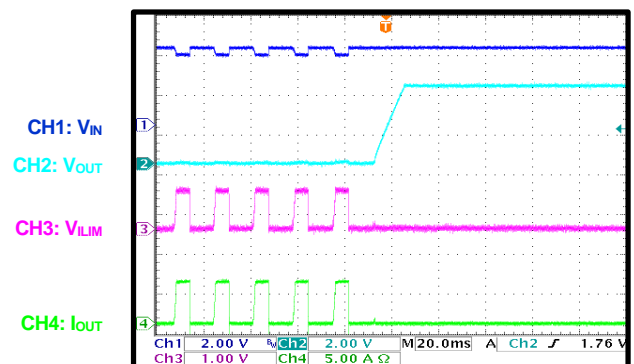Shutdown through VCC
 $V_{IN} = V_{EN} = 3.6V$, $V_{CC} = 3.6V$, $I_{OUT} = 7A$

Start-Up with PG
 $V_{IN} = 3.6V$, $V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$

Shutdown with PG
 $V_{IN} = 3.6V$, $V_{CC} = V_{EN} = 3.6V$, $I_{OUT} = 7A$


TYPICAL PERFORMANCE CHARACTERISTICS (continued)
 $V_{IN} = 3.6V$, $V_{EN} = 3.6V$, $R_{LIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

Start-Up through EN
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 7A$

Shutdown through EN
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 7A$

Start-Up through EN with PG
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 5A$

Shutdown through EN with PG
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 5A$

Start-Up through VCC with PG
 $V_{IN} = V_{EN} = 3.6V$, $V_{CC} = 3.6V$, $I_{OUT} = 7A$

Shutdown through VCC with PG
 $V_{IN} = V_{EN} = 3.6V$, $V_{CC} = 3.6V$, $I_{OUT} = 7A$


TYPICAL PERFORMANCE CHARACTERISTICS (continued)
 $V_{IN} = 3.6V$, $V_{EN} = 3.6V$, $R_{ILIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

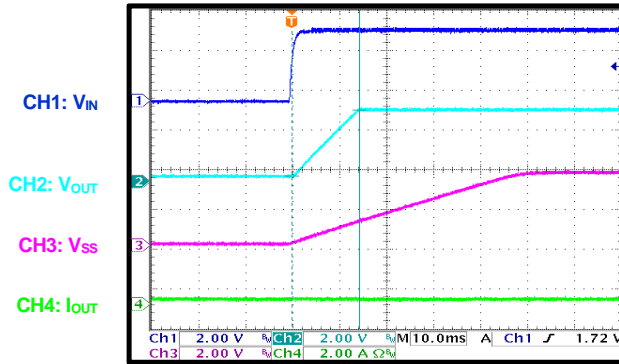
Load Transient
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 0A$ to 2.5A

Load Transient
 $V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 0A$ to 7A

SCP Start-Up
 $V_{IN} = V_{CC} = 3.6V$, $V_{EN} = 4V$

SCP Shutdown
 $V_{IN} = V_{CC} = 3.6V$, $V_{EN} = 4V$

SCP
 $V_{IN} = V_{CC} = 3.6V$

SCP Recovery
 $V_{IN} = V_{CC} = 3.6V$


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 3.6V$, $V_{EN} = 3.6V$, $R_{ILIM} = 10.7k\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

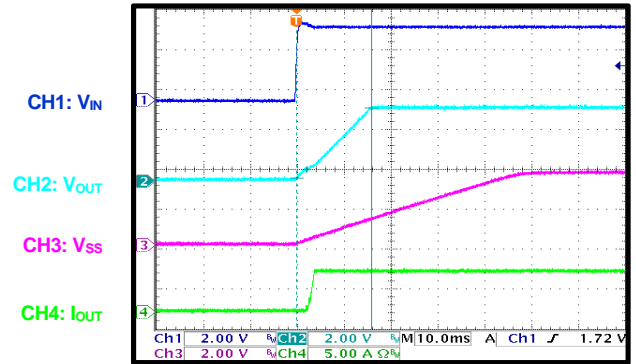
Soft Start

$V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 5A$




Soft Start

$V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 5A$




Current Limit Warning

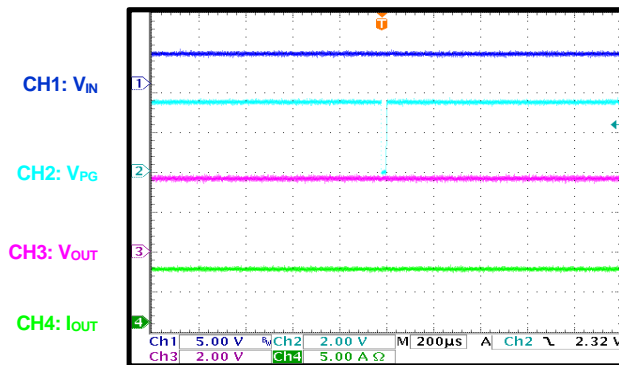$V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 6.7A$



Current Limit

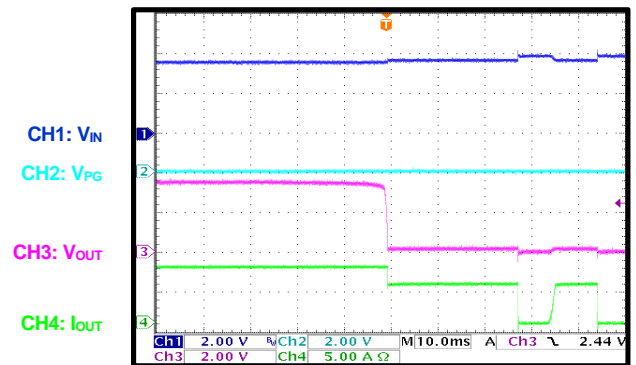$V_{IN} = V_{CC} = 3.6V$, $I_{OUT} = 7.1A$



FUNCTIONAL BLOCK DIAGRAM

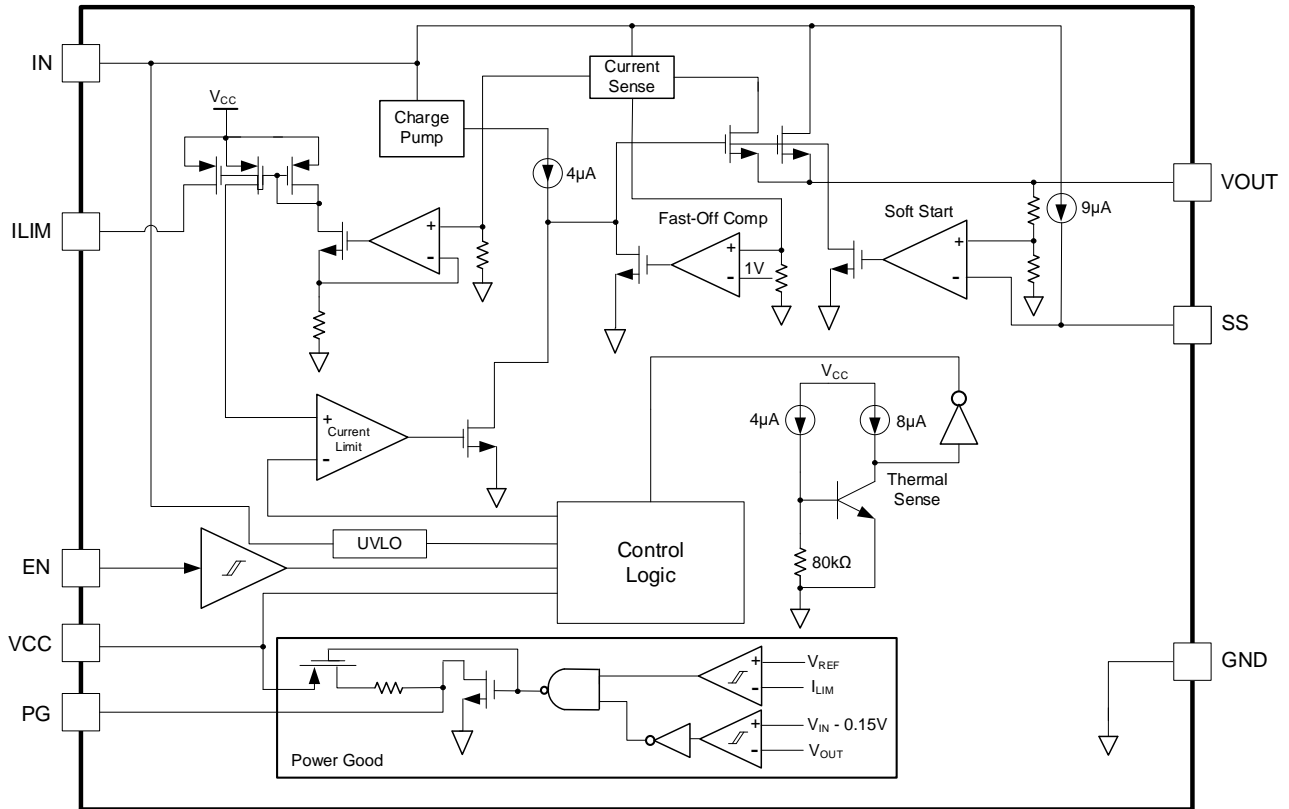


Figure 1: Functional Block Diagram

OPERATION

The MPQ5077A is a configurable load switch designed to limit the inrush current to the load, which limits the backplane's voltage drop and the slew rate of the voltage to the load. The MPQ5077A provides an integrated solution to monitor the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}), eliminating the need for an external current power MOSFET and current switch device.

Enable (EN)

Once V_{IN} exceeds the under-voltage lockout (UVLO) threshold (typically 0.5V) and the EN pin is pulled above 1.5V, the MPQ5077A is enabled. Pull EN down to ground to disable the MPQ5077A.

Current Limit

The MPQ5077A provides a constant current limit configured by an external resistor. Once the device reaches its current limit (I_{LIMIT}) threshold, the IC regulates the gate voltage to hold a constant current in the power MOSFET. The typical response time is about 20 μ s, during which a small overshoot in I_{OUT} may occur. The preset I_{LIMIT} (I_{LIM}) can be calculated with Equation (1):

$$I_{LIM} = (0.974/R_{LIM}) \times S \quad (1)$$

Where 0.974 is the reference value, S is the MPQ5077A's current-sense ratio, and the typical value is 87000 when $V_{IN} = 3.6V$.

S shifts incrementally when V_{CC} and V_{IN} change. See the Typical Performance Characteristics section on page 5 for more information.

If the I_{LIMIT} block starts regulating I_{OUT} , the power loss in the power MOSFET causes the IC's temperature to rise. If the junction temperature (T_J) rises high enough, the MPQ5077A goes into thermal shutdown. When thermal shutdown occurs, the output is disabled until the over-temperature (OT) fault is removed. The OT threshold is 155°C, and the hysteresis is 30°C.

Power Good (PG)

The power good (PG) pin is the push-pull of a MOSFET that can be pulled high to V_{CC} . The MOSFET turns on when V_{IN} is applied to pull PG to GND. Once the voltage gap between V_{IN} and V_{OUT} is below 150mV, PG is pulled high

after a 70 μ s delay. If the voltage gap exceeds 200mV or the over-current (OC) limit warning is triggered, then PG is pulled low without a time delay. PG has a typical 200 Ω pull-down resistance and a 250k Ω pull-up resistance. If PG is pulled to GND via the internal pull-down resistor, the maximum sink current should be <10mA.

Short-Circuit Protection (SCP)

If a short circuit causes the load current to rapidly increase, the current may significantly exceed its limit threshold before the control loop is able to respond. If the current reaches the internal secondary I_{LIMIT} (typically 13A), a fast turn-off circuit shuts down the power MOSFET, limiting the peak current through the switch as well as the V_{IN} drop. The total short circuit response time is about 200ns. If the fast turn-off works, the power MOSFET remains off for 80 μ s. After the 80 μ s, the power MOSFET turns back on. If the short circuit remains, the MPQ5077A reduces and holds I_{LIMIT} to 2/3 of the preset value until the part is hot enough to trigger thermal shutdown. Once the short circuit condition is removed, I_{LIMIT} automatically recovers to the preset value.

Output Discharge

The MPQ5077A provides output discharge to discharge V_{OUT} via an internal pull-down resistor when the IC's EN pin is disabled or V_{CC} shuts down and the load is very light.

Soft Start (SS)

The capacitor connected to the SS pin determines the soft-start time (t_{SS}). An internal, 9 μ A constant-current source charges the SS capacitor (C_{SS}) and ramps up the voltage on the SS pin (V_{SS}). V_{OUT} rises at three times the slew rate of V_{SS} . t_{SS} can be calculated with Equation (2):

$$t_{SS}(\text{ms}) = \frac{1}{3} \times \frac{V_{OUT}(\text{V}) \times C_{SS}(\text{nF})}{I_{SS}(\mu\text{A})} \quad (2)$$

Where I_{SS} is internal, 9 μ A constant current.

It is recommended that the minimum C_{SS} should exceed 4.7nF. If the SS pin is floating or C_{SS} is too small, then the V_{OUT} rising time is only limited by the power MOSFET charge time.

APPLICATION INFORMATION

Selecting the I_{LIMIT} Resistor

I_{LIMIT} is set by the I_{LIMIT} resistor ($R_{I_{LIMIT}}$) and can be calculated with Equation (1) on page 15.

The I_{LIMIT} threshold is recommended to be 10% to 20% greater than the maximum load current. For example, if a system’s full load is 7A, set I_{LIMIT} to 7.7A.

Selecting the Soft-Start Capacitor (C_{SS})

An internal, 9 μ A constant-current source charges C_{SS} and ramps up V_{SS} . V_{OUT} rises at three times the slew rate of V_{SS} .

If the inrush of I_{OUT} reaches I_{LIMIT} during start-up (e.g. if there is a large output capacitor or large load), the MPQ5077A limits I_{OUT} and t_{SS} increases simultaneously.

Figure 2 shows SS under different loads.

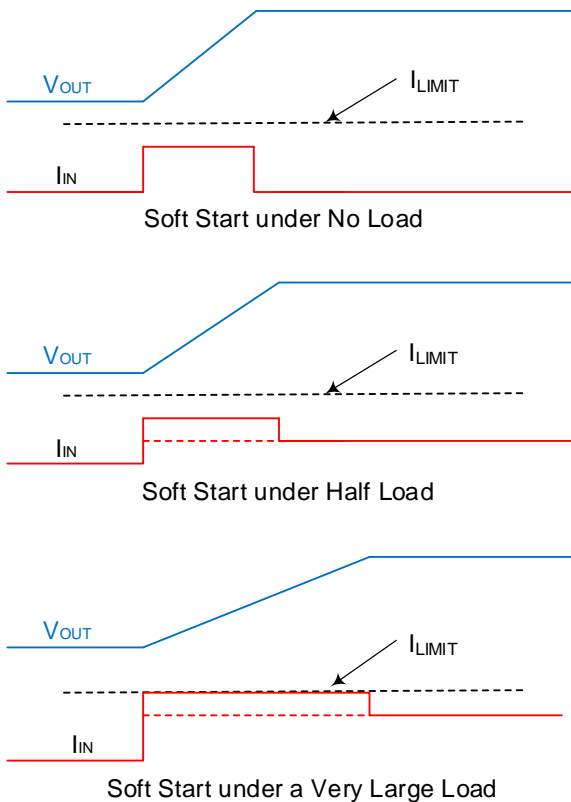


Figure 2: SS under Different Loads

Figure 3 shows SS with different output capacitances.

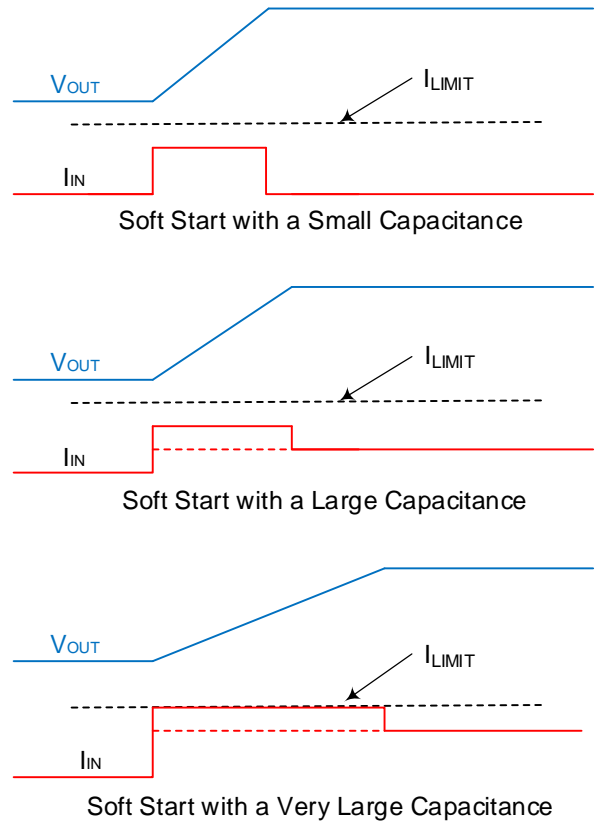


Figure 3: SS with Different Output Capacitances

Design Example

Table 1 lists key parameters for selecting components.

Table 1: Selecting Components

V_{IN} (V)	Max Load Range (A)	$R_{I_{LIMIT}}$ (k Ω)	C_{SS} (nF)	t_{SS} (ms)
5	3	26.1	22	4
5	5	15.4	47	9
5	7	10.7	100	20

See Figure 4 on page 17 for the example application schematic.

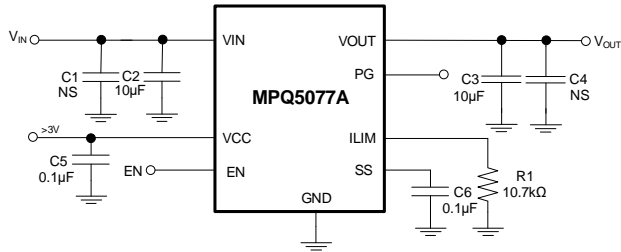


Figure 4: Example Application Schematic

PCB Layout Guidelines

Efficient PCB layout is critical to achieve stable operation. For the best results, refer to Figure 5 and follow the guidelines below:

1. Place R_{LIMIT} close to the ILIM pin.
2. Place the input capacitor close to the VCC pin.
3. Place enough vias around the IC to improve thermal performance.

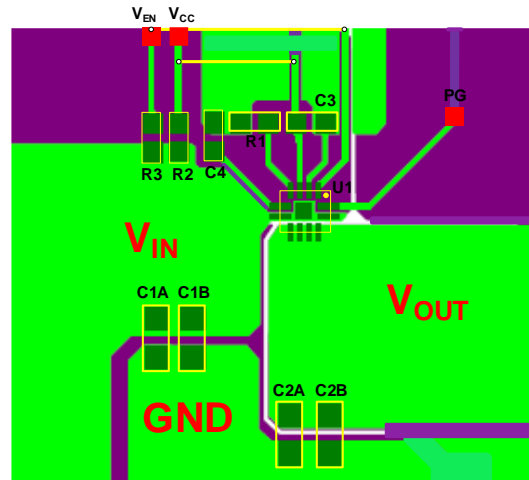


Figure 5: Recommended PCB Layout

TYPICAL APPLICATION CIRCUIT


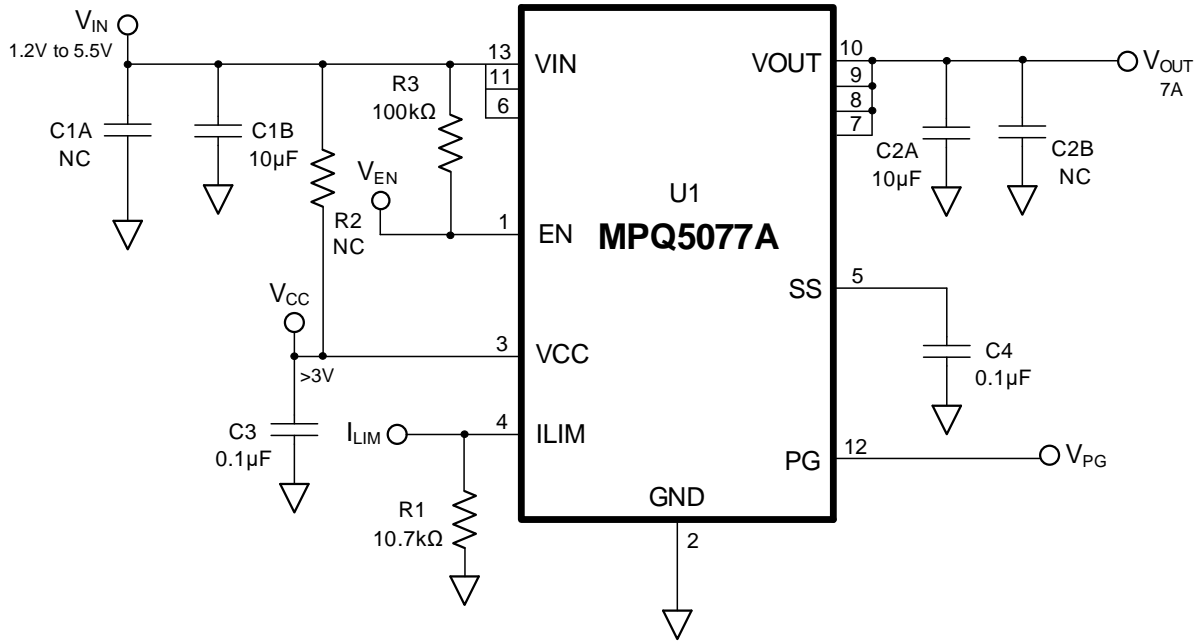



Figure 6: Typical Application Circuit

PACKAGE INFORMATION

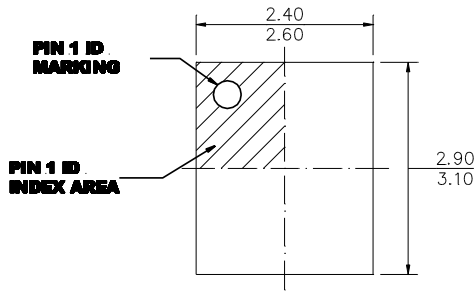
QFN-13 (2.5mmx3mm)




TOP VIEW

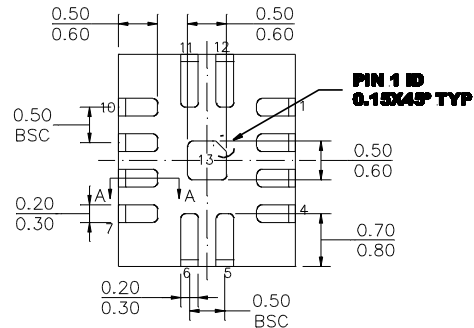


BOTTOM VIEW



SIDE VIEW




SECTION A-A

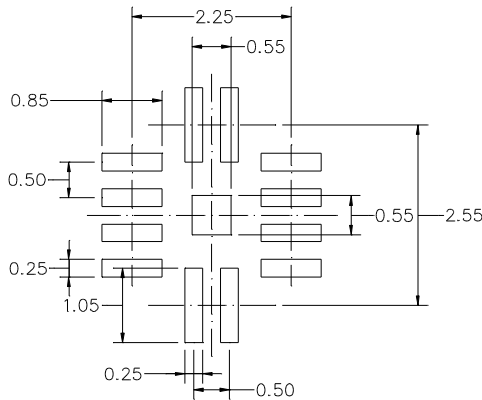

RECOMMENDED LAND PATTERN

NOTE:

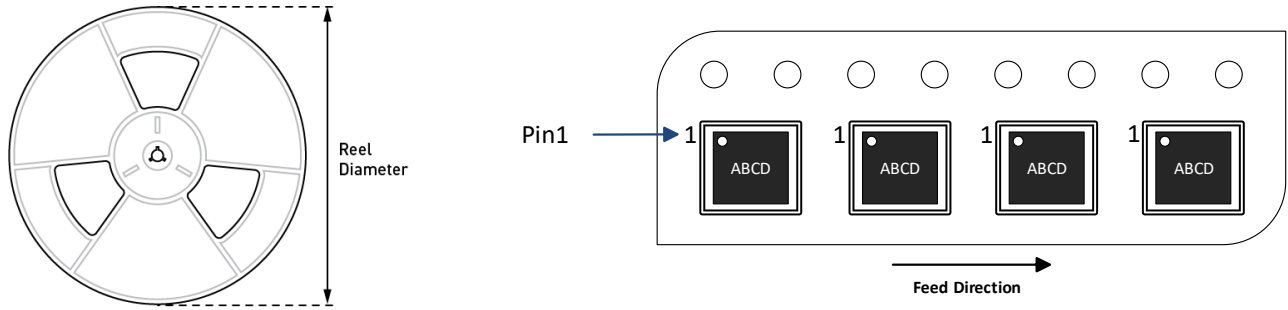- 1) THE LEAD SIDE IS WETTABLE.
- 2) ALL DIMENSIONS ARE IN MILLIMETERS.
- 3) LEAD COPLANARITY SHALL BE 0.08 MILLIMETERS MAX.
- 4) JEDEC REFERENCE IS MO-220.
- 5) DRAWING IS NOT TO SCALE.

CARRIER INFORMATION


Part Number	Package Description	Quantity/ Reel	Quantity/ Tube	Quantity/ Tray	Reel Diameter	Carrier Tape Width	Carrier Tape Pitch
MPQ5077AGQBE-AEC1-Z	QFN-13 (2.5mmx3mm)	5000	N/A	N/A	13in	12mm	8mm

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	8/2/2023	Initial Release	-
1.1	12/4/2023	Grammar updates	1
		<ul style="list-style-type: none"> Updated off-state leakage current max to 0.2μA Removed shutdown temperature min value and added typ value (155°C) Removed "Current Limit" min and max values for $R_{LIMIT} = 11k\Omega$ Updated current limit warning min value to 1.28A and max value to 1.92A Removed current limit voltage min value for $R_{LIMIT} = 50k\Omega$ 	4
		Updated title of top-left curve to "V _{CC} Quiescent Current"; updated title of top-right curve to "V _{IN} Quiescent Current" and conditions to V _{EN} = 2V	5
		Updated title of top-left curve to "V _{CC} Quiescent Current vs. Temperature"; updated title of top-right curve to "V _{IN} Quiescent Current vs. Temperature"	8
		Update capacitor values in Figure 4: C1 = NS, C2 = 10 μ F, C3 = 10 μ F	17

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.