



The Future of Analog IC Technology®

EV24943DN-00A

3A, 55V, 100kHz Step-Down Converter with Programmable Output OVP Evaluation Board

DESCRIPTION

The EV24943DN-00A is an evaluation board for the MP24943. The MP24943 is a monolithic step-down switch mode converter. It achieves 3A continuous output current over a wide input supply range with excellent load and line regulation. An external 4ms soft start setting prevents inrush current at turning on.

MP24943 achieves low EMI signature with well controlled switching edges.

Fault condition protection includes short circuit protection, programmable output over voltage protection and thermal shutdown.

The MP24943 requires a minimum number of readily available standard external components.

ELECTRICAL SPECIFICATIONS

| Parameter | Symbol | Value | Units |
|----------------|-----------|---------|-------|
| Input Voltage | V_{IN} | 8 to 55 | V |
| Output Voltage | V_{OUT} | 5 | V |
| Output OVP | V_{OVP} | 6 | V |

FEATURES

- Wide 8V to 55V Operating Input Range
- 3A Output Current
- Programmable Output Over Voltage Protection
- External 4ms Soft Start Setting
- Stable with Low ESR Output Ceramic Capacitors
- Fixed 100kHz Frequency
- Low EMI Signature
- Thermal Shutdown
- Short Circuit Protection

APPLICATIONS

- Automotive GPS
- Car DVD
- Power Supply for Linear Chargers


For MPS green status, please visit MPS website under Quality Assurance. MPS® and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV24943DN-00A EVALUATION BOARD



| Board Number | MPS IC Number |
|---------------|---------------|
| EV24943DN-00A | MP24943 |

Efficiency vs. I_{OUT}

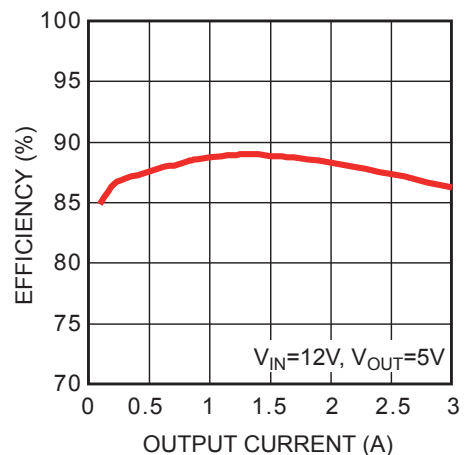

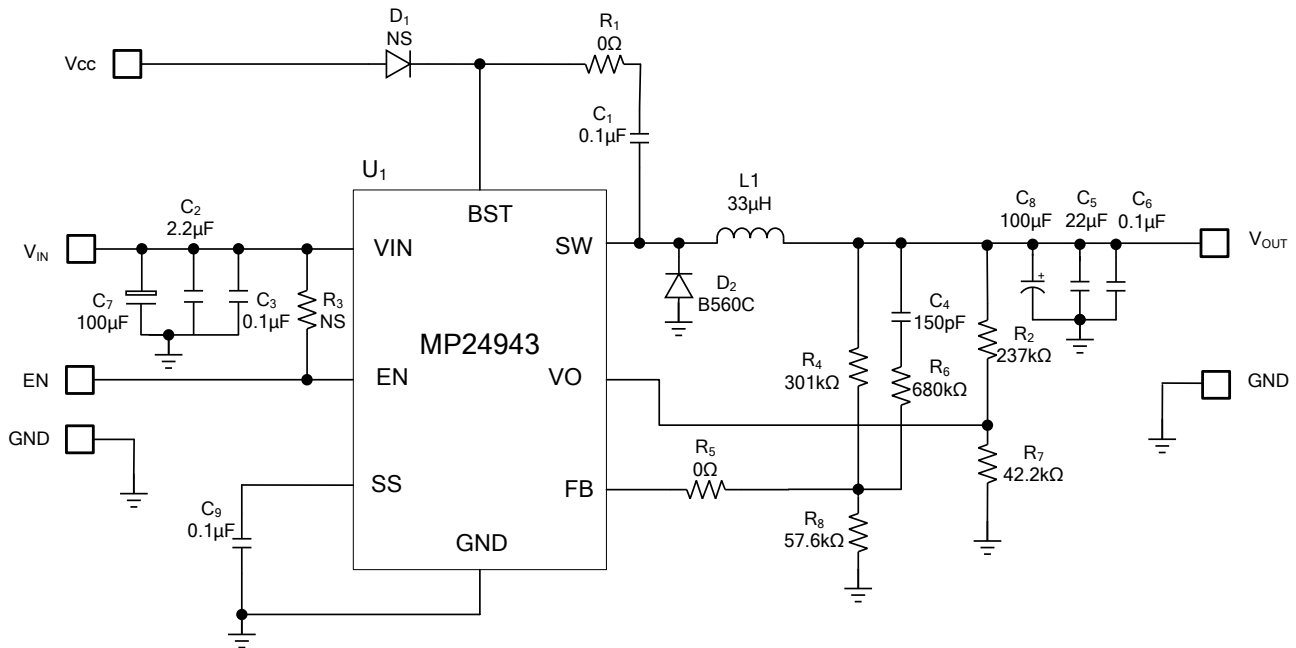EVALUATION BOARD SCHEMATIC

EV24943DN-00A BILL OF MATERIALS


| Qty | RefDes | Value | Description | Package | Manufacturer | Manufacturer P/N |
|-----|----------|-------|-------------------------|---------|--------------|--------------------|
| 3 | C1,C6,C9 | 0.1μF | Ceramic Cap., 25V, X7R | 0603 | muRata | GRM188R71H104KA01D |
| 1 | C2 | 2.2μF | Ceramic Cap., 100V, X7R | 1210 | muRata | GRM32ER72A225KA35L |
| 1 | C3 | 0.1μF | Ceramic Cap., 100V, X7R | 0603 | muRata | GRM188R71H104KA35D |
| 1 | C4 | 150pF | Ceramic Cap., 50V, C0G | 0603 | muRata | GRM1885C1H151JA01 |
| 1 | C5 | 22μF | Ceramic Cap., 16V, X7R | 1210 | muRata | GRM32ER71C226ME18L |
| 1 | C7 | 100μF | Electrolytic Cap., 100V | DIP | JiangHai | CD287-100V100 |
| 1 | C8 | 100μF | Electrolytic Cap., 16V | SMD | JiangHai | VZ1-16V100 |
| 0 | D1 | NS | Do Not Stuff | | | |
| 1 | D2 | B560C | Schottky Diode, 60V, 5A | SMC | Diodes | B560C |
| 1 | L1 | 33μH | Inductor, 5.5A/45mΩ | SMD | Würth | 7447709330 |
| 2 | R1, R5 | 0 | Film Resistor, 5% | 0603 | Yageo | RC0603JR-070RL |
| 1 | R2 | 237k | Film Resistor, 1% | 0603 | Yageo | RC0603FR-07237KL |
| 0 | R3 | NS | Do Not Stuff | | | |
| 1 | R4 | 301k | Film Resistor, 1% | 0603 | Yageo | RC0603FR-07301KL |
| 1 | R6 | 680k | Film Resistor, 1% | 0603 | Yageo | RC0603FR-07680KL |
| 1 | R7 | 42.2k | Film Resistor, 1% | 0603 | Yageo | RC0603FR-0742K2L |
| 1 | R8 | 57.6k | Film Resistor, 1% | 0603 | Yageo | RC0603FR-0757K6L |
| 1 | U1 | | DC-DC Converter | SOIC8E | MPS | MP24943DN |

EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

C7=100µF, C2=2.2µF, C8=100µF, C5=22µF, L1=33µH, T_A=25°C, unless otherwise noted.


Loop Gain with Phase Margin
 $V_{IN}=12V, V_{OUT}=5V, I_{OUT}=3A$, Resistor Load

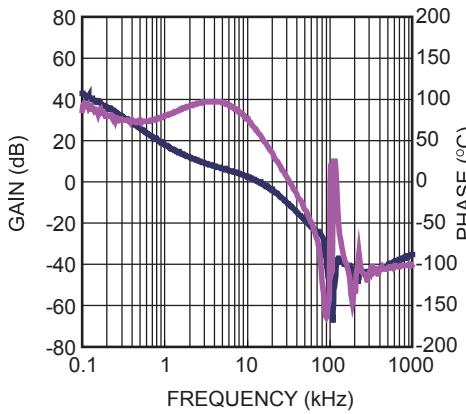

Efficiency vs. Output Current
 $V_{OUT}=5V$

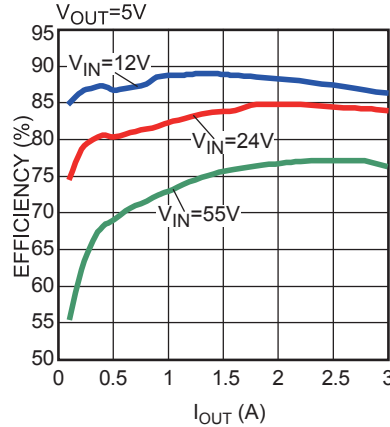


Load Regulation

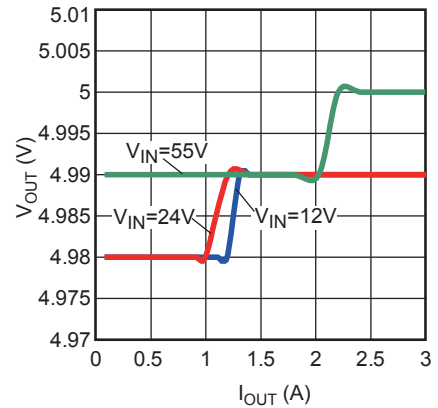


EMI Radiation

$V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A$, Resistor Load

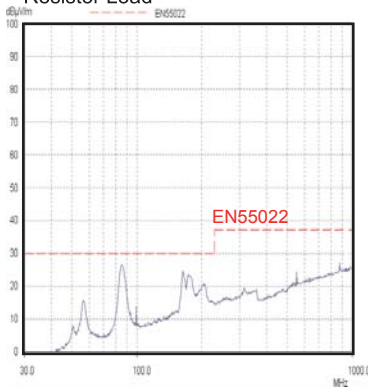


Steady State

$V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A$, E-Load

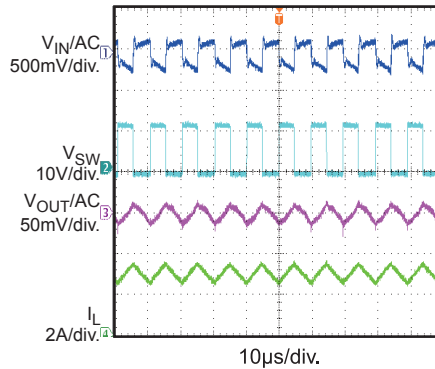


Steady State

$V_{IN} = 55V, V_{OUT} = 5V, I_{OUT} = 3A$, E-Load

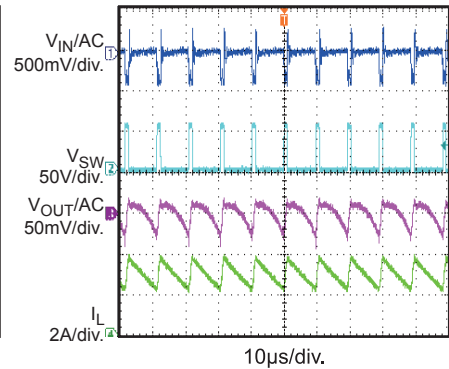


Power Ramp Up

$V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A$, Resistor Load

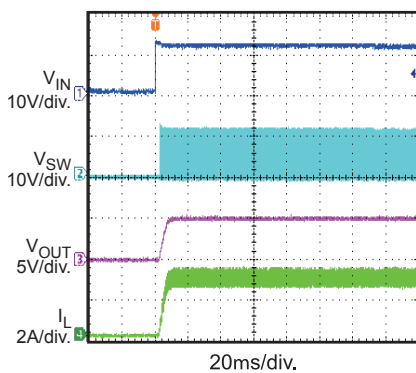


Power Ramp Down

$V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A$, Resistor Load

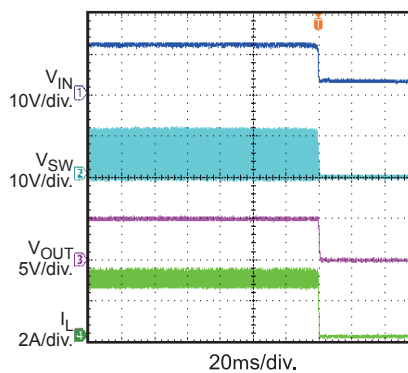

Enable Start Up

$V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A$, Resistor Load

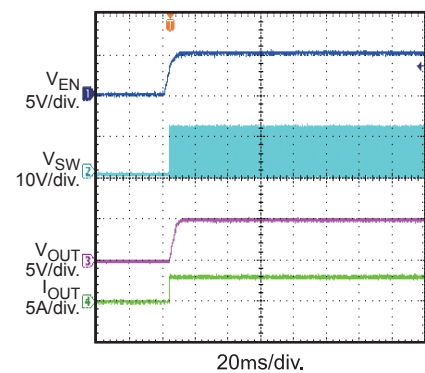


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

C7=100µF, C2=2.2µF, C8=100µF, C5=22µF, L1=33µH, T_A=25°C, unless otherwise noted.


Enable Shutdown

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A,
Resistor Load

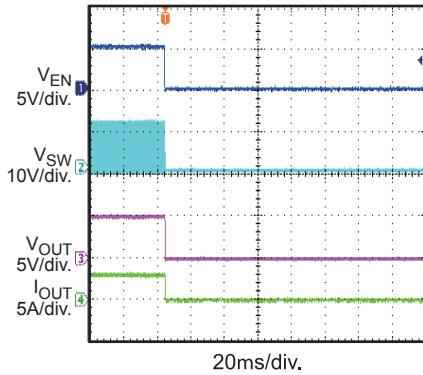


Short Circuit Enter

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 0A

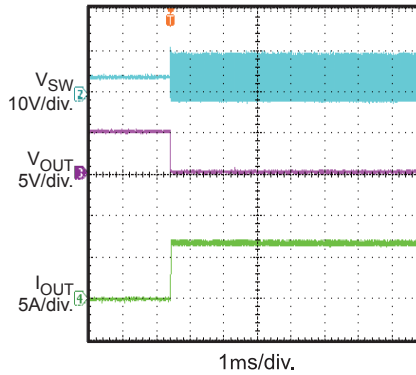


Short Circuit Steady

V_{IN} = 12V, V_{OUT} = 5V

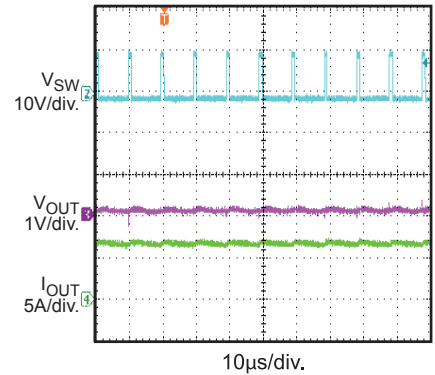


Short Circuit Recovery

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 0A

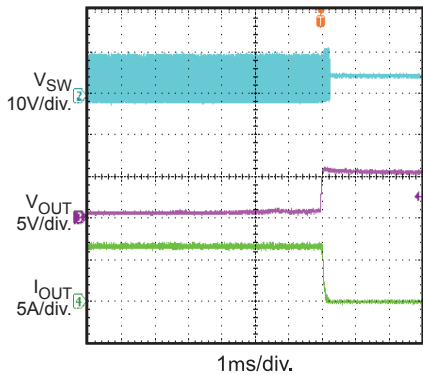


Load Transient Response

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A,
Slew Rate=6.4mA/µs

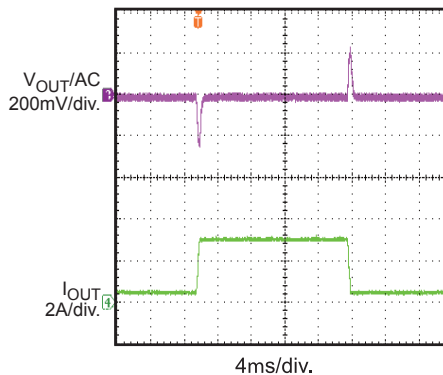


OVP Enter

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A,
E-Load

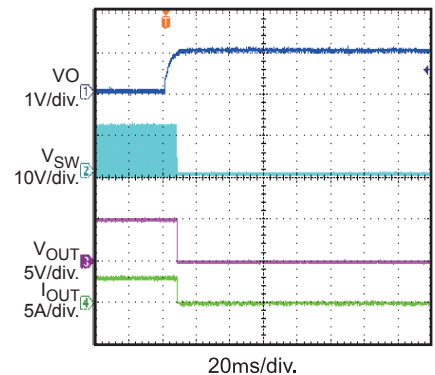

OVP Recovery

V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A,
E-Load

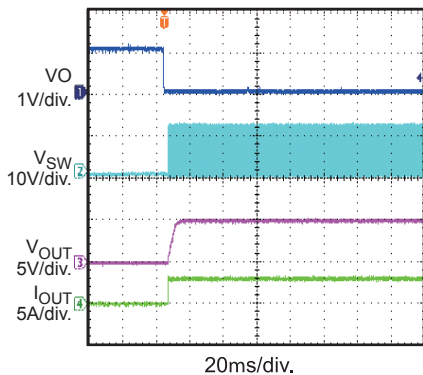

PRINTED CIRCUIT BOARD LAYOUT

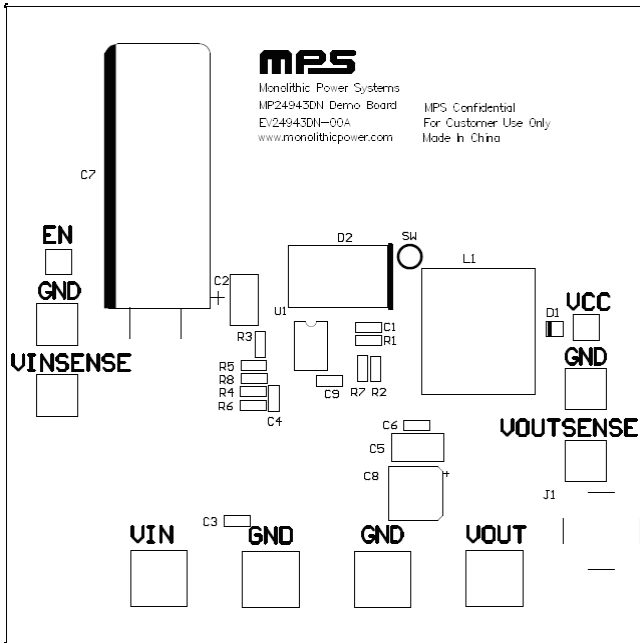


Figure 1—Top Silk Layer

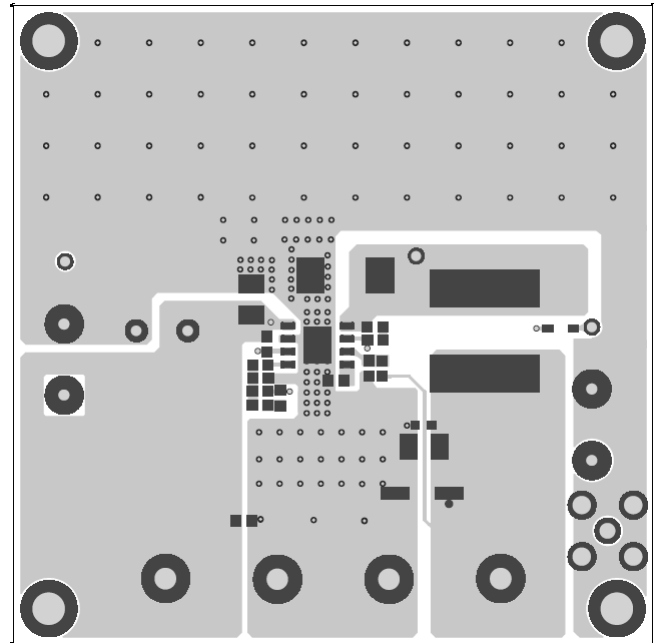


Figure 2—Top Layer

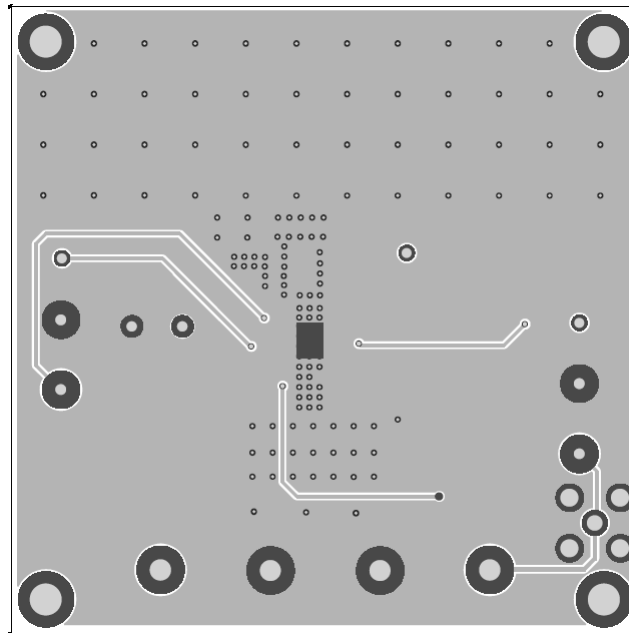


Figure 3—Bottom Layer

QUICK START GUIDE

1. The output voltage of this board is set to 5V. The board layout accommodates most commonly used inductors and output capacitors.
2. Attach the positive and negative ends of the load to the VOUT and GND pins, respectively.
3. Attach the input voltage ($8V \leq V_{IN} \leq 55V$) and input ground to the VIN and GND pins, respectively.
4. To use the Enable supply on, apply a digital input to the EN pin. Drive EN higher than 1.8V to turn on the regulator, drive EN less than 0.4V to turn it off.
5. The output voltage V_{OUT} can be set by R8. The formula is:

$$R8 = R4 \times \frac{V_{FB}}{V_{OUT} - V_{FB}}$$

Where $V_{FB} = 0.8V$

For example, for $V_{OUT} = 5V$, $R4=301k\Omega$:

$$R8 = R4 \times \frac{V_{FB}}{V_{OUT} - V_{FB}} = 301k\Omega \times \frac{0.8V}{5V - 0.8V} \approx 57.6k\Omega$$

For the closest standard 1% value.

6. When the VO pin voltage is higher than 0.9V, the part will shutdown until VO pin voltage drops below 0.9V. The R7 is set as:

$$R7 = R2 \times \frac{0.9V}{(V_{OVP} - 0.9V)}$$

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.